

Angle Power Strip


Slim Profile (APT Series)



Slim profile Angle Power Strip with 15-amp tamper-resistant single receptacles; custom options available



24" fixture shown in Satin Nickel
with Grey receptacles
APT24-4G-P-SN

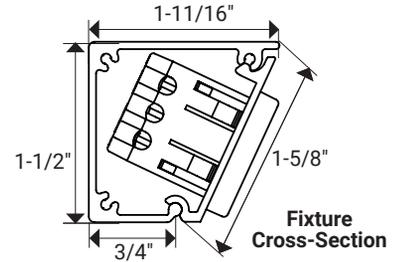

ABOUT THE PRODUCT

- Slim profile: 1-1/2"
- 15-amp tamper-resistant single receptacles
- Available in standard and custom fixtures
- Custom options include: rocker switches, additional receptacles, and length
- Simple to install fully assembled fixture with wood screws and wall anchors (included)
- Designer finishes to blend with any décor
- UL listed

APPLICATIONS

Under cabinet

Offices and computer labs

Shops and garages

For additional application help and suggestions, call Design Services at 866-848-9094

CUSTOM OPTIONS

APT-R-Color-15A
15-amp tamper-resistant receptacles to add to custom fixtures. Available in Black (B), Grey (G), or White (W).

APS-Switch-Color
15-amp rocker switch to add to custom fixtures. Available in Black (B), Grey (G), or White (W).

Ordering information

120-volt single receptacles, available in standard and custom fixture options

Part Number	Length	Number of Receptacles
APT9-2Color-P-Finish-*Position	9" (229 mm)	2
APT12-2Color-P-Finish-*Position	12" (305 mm)	2
APT18-3Color-P-Finish-*Position	18" (457 mm)	3
APT24-4Color-P-Finish	24" (610 mm)	4
APT30-4Color-P-Finish	30" (762 mm)	4
APT36-4Color-P-Finish	36" (914 mm)	4
APT42-5Color-P-Finish	42" (1067 mm)	5
APT48-5Color-P-Finish	48" (1219 mm)	5
APT60-7Color-P-Finish	60" (1524 mm)	7
APT72-8Color-P-Finish	72" (1829 mm)	8

Custom lengths, receptacle placements, and optional rocker switch placement available.
Contact Design Services at 866-848-9094

*Position indicates Left (L) or Right (R) side wire entry.

Blue indicates dealer choice: Color indicates receptacle color, and Finish indicates fixture finish color.


TECHNICAL INFORMATION

Input Voltage	120-volt AC
Rating	cULus Listed
Amps	15 amp
Mounting	Wood screws and wall anchors (included)
Wiring	12-gauge Romex for receptacles
Environment	Dry locations
Construction Material	Powder-coated aluminum
Warranty	5 years


AVAILABLE FINISH OPTIONS WITH COORDINATING RECEPTACLE COLOR




72" Fixture—APT72-8Color-P-Finish




60" Fixture—APT60-7Color-P-Finish

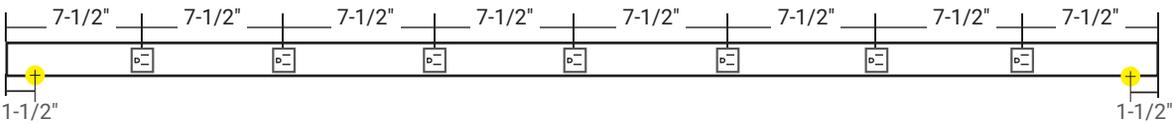


48" Fixture—APT48-5Color-P-Finish

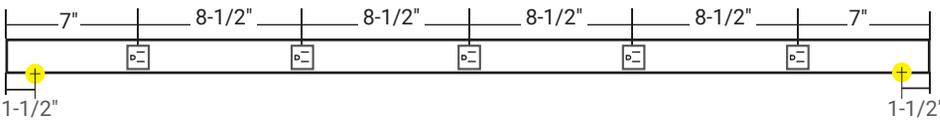


42" Fixture—APT42-5Color-P-Finish




36" Fixture—APT36-4Color-P-Finish



30" Fixture—APT30-4Color-P-Finish




24" Fixture—APT24-4Color-P-Finish




LEFT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-L**



**12" Fixture
APT12-2Color-P-Finish-L**




**9" Fixture
APT9-2Color-P-Finish-L**




RIGHT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-R**



**12" Fixture
APT12-2Color-P-Finish-R**



**9" Fixture
APT9-2Color-P-Finish-R**



LEGEND

 = 15-amp receptacle available in Black (B), Grey (G), or White (W)

 = Knockout (all knockouts are located on the back side of fixture and are 1-1/2" from the end)

CUSTOM OPTIONS/DETAILS

- Custom lengths from 6"–92" (larger sizes will have a seam when assembled)
- 120-volt integral switch (available in Black, Grey, or White)
- Additional receptacles
- Custom receptacle/switch placement
- Receptacles must be a minimum of 1-1/2" apart (on center)
- Receptacles must be a minimum of 2" from the end. (Requires wire entry at opposite end of fixture—**knockout cannot be behind device**)
- 4-1/2" of room suggested for wire entry at knockout location
- Custom charges and additional design limitations may apply—Call Design Services at 866-848-9094 for a quote, lead time, and assistance with your custom order

Angle Power Strip


USB-A Included (TR-USB Series)



Standard profile Angle Power Strip with 20-amp tamper-resistant duplex receptacles and 15-amp USB-A/receptacle combo device



24" fixture shown in Satin Nickel with Grey receptacles
TRU24-2G-P-SN

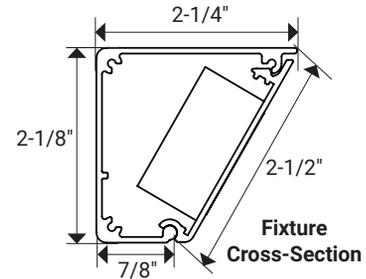

ABOUT THE PRODUCT

- Low profile: 2-1/8"
- 20-amp tamper-resistant duplex receptacles
- 15-amp tamper-resistant USB-A/receptacle combo device
- Available in standard fixtures only: see page 50 for a TR Series custom fixture
- Simple to install fully assembled fixture with wood screws and wall anchors (included)
- Designer finishes to blend with any décor
- UL listed

APPLICATIONS

Under cabinet

Offices and computer labs

Shops and garages

For additional application help and suggestions, call Design Services at 866-848-9094

Ordering information

120-volt duplex receptacles with USB-A/receptacle combo device included, available in standard fixture options

Part Number	Length	Number of Combo/USB Receptacles	Number of Duplex Receptacles
TRU9-1Color-P-Finish	9" (229 mm)	1	
TRU12-1Color-P-Finish	12" (305 mm)	1	
TRU18-2Color-P-Finish	18" (457 mm)	1	1
TRU24-2Color-P-Finish	24" (610 mm)	1	1
TRU30-2Color-P-Finish	30" (762 mm)	1	1
TRU36-2Color-P-Finish	36" (914 mm)	1	1
TRU42-3Color-P-Finish	42" (1067 mm)	1	2
TRU48-3Color-P-Finish	48" (1219 mm)	1	2
TRU60-4Color-P-Finish	60" (1524 mm)	1	3
TRU72-4Color-P-Finish	72" (1829 mm)	1	3

USB device is always positioned on the left side.

Blue indicates dealer choice: Color indicates receptacle color and Finish indicates fixture finish color.

TECHNICAL INFORMATION

Input Voltage	120-volt AC
Rating	cULus Listed
Amps	15 amp
Mounting	Wood screws and wall anchors (included)
Wiring	12-gauge Romex for receptacles
Environment	Dry locations
Construction Material	Powder-coated aluminum
Warranty	5 years

AVAILABLE FINISH OPTIONS WITH COORDINATING RECEPTACLE COLOR



Black (B)



Black (B)




Grey (G)




White (W)




72" Fixture—TRU72-4ColorD-P-Finish

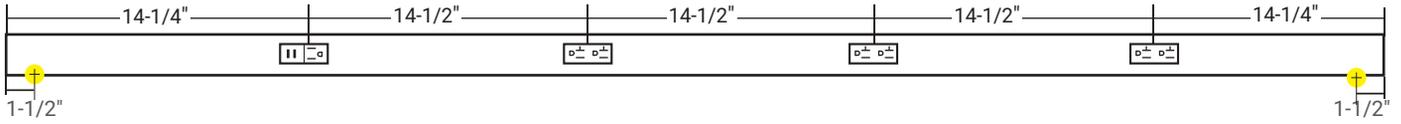


60" Fixture—TRU60-4ColorD-P-Finish

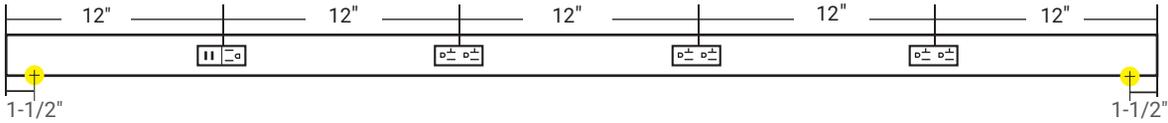


48" Fixture—TRU48-3ColorD-P-Finish

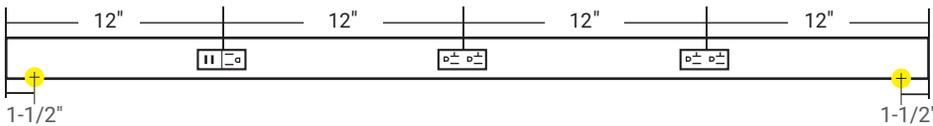


42" Fixture—TRU42-3ColorD-P-Finish

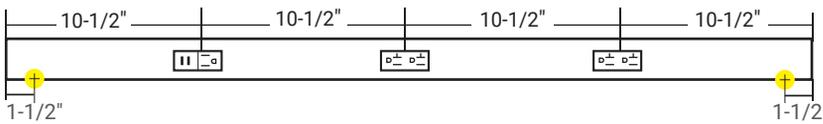


36" Fixture—TRU36-2ColorD-P-Finish

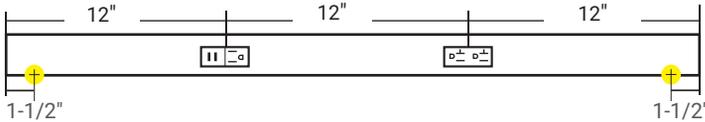


30" Fixture—TRU30-2ColorD-P-Finish




24" Fixture—TRU24-2ColorD-P-Finish

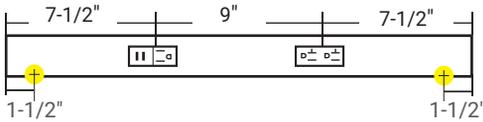


18" Fixture—TRU18-2ColorD-P-Finish



12" Fixture—TRU12-1ColorD-P-Finish



9" Fixture—TRU9-1ColorD-P-Finish



LEGEND


-  = Knockout (all knockouts are located on the back side of fixture and are 1-1/2" from the end)
-  = 20-amp standard duplex receptacle available in Black (B), Grey (G), or White (W)
-  = USB-A/receptacle combo 15-amp standard receptacle available in Black (B), Grey (G), or White (W)

Angle Power Strip

Switch Included (TRS Series)



Standard profile Angle Power Strip with 20-amp tamper-resistant duplex receptacles and 15-amp control switch

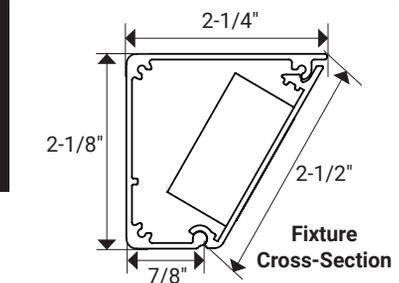

ABOUT THE PRODUCT

- Low profile: 2-1/8"
- 20-amp tamper-resistant duplex receptacles
- 15-amp switch included on each fixture for controlling lights and/or garbage disposal
- Available in standard fixtures only: see page 50 for TR Series for a custom fixture
- Simple to install fully assembled fixture with wood screws and wall anchors (included)
- Designer finishes to blend with any décor
- UL listed

APPLICATIONS

- Under cabinet
- Offices and computer labs
- Shops and garages

For additional application help and suggestions, call Design Services at 866-848-9094

SWITCH DESCRIPTIONS

TRO-CB-1P/REC-Color
Combination 15-amp single pole switch: 1/2 horsepower, 120-volt AC, 15-amp tamper-resistant receptacle

TRO-DS-2SPS-Color
Dual 15-amp single pole switch: 1/2 horsepower at 120-volt AC. 12-amp max shared amperage between the switches

Ordering information

120-volt duplex receptacles with switch included, available in standard fixture options


Part Number	Length	Number of Combo/ Switch Receptacles	Number of Duplex Switches	Number of Duplex Receptacles
TRS9-1Color-Finish	9" (229 mm)	1		
TRS12-1Color-Finish	12" (305 mm)	1		
TRS18-2Color-Finish-Switch	18" (457 mm)		1	1
TRS24-3Color-Finish-Switch	24" (610 mm)		1	2
TRS30-3Color-Finish-Switch	30" (762 mm)		1	2
TRS36-3Color-Finish-Switch	36" (914 mm)		1	2











Switch can be located on Left Side (LS) or Right Side (RS) of 18"–36" fixtures.
Blue indicates dealer choice: Color indicates receptacle color, Finish indicates fixture finish color, and Switch indicates placement side of the switch installed.

TECHNICAL INFORMATION

Input Voltage	120-volt AC
Rating	cULus Listed
Amps	15 amp
Mounting	Wood screws and wall anchors (included)
Wiring	12-gauge Romex for receptacles
Environment	Dry locations
Construction Material	Powder-coated aluminum
Warranty	5 years

AVAILABLE FINISH OPTIONS WITH COORDINATING RECEPTACLE COLOR

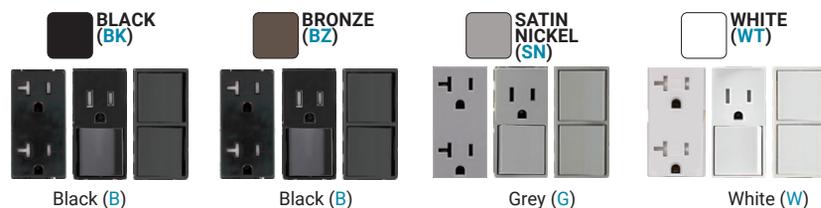

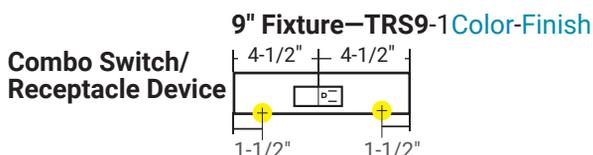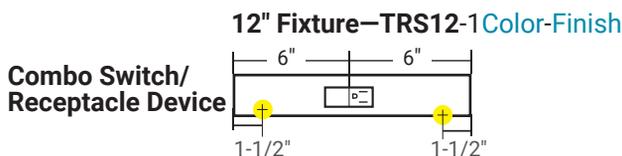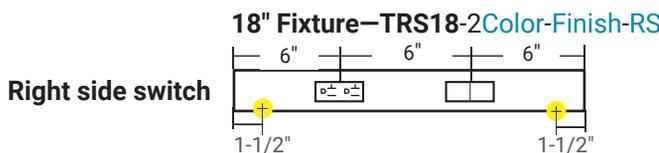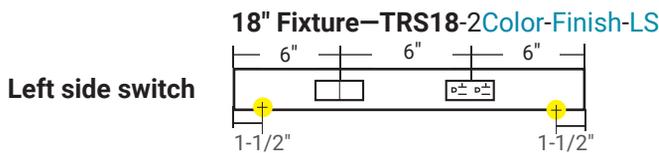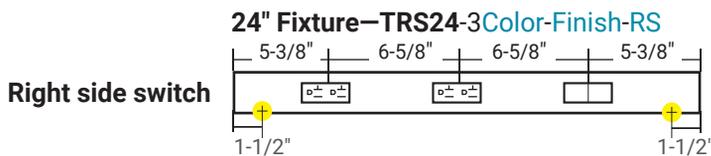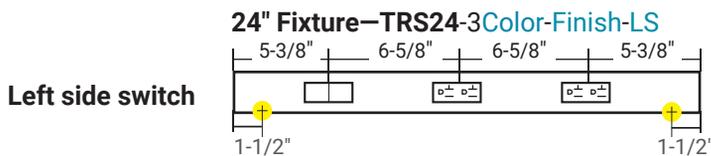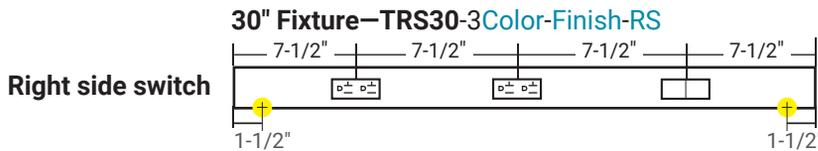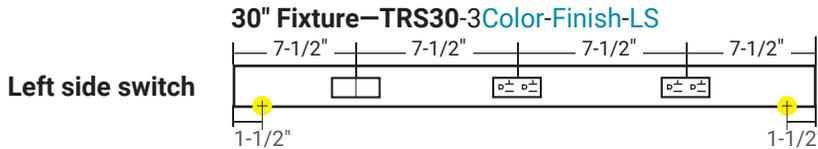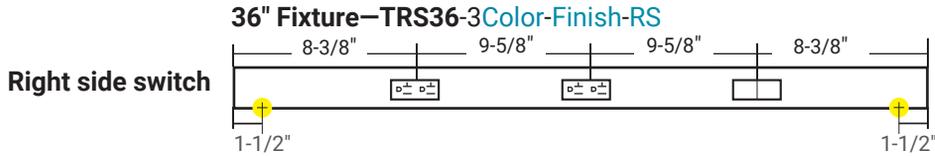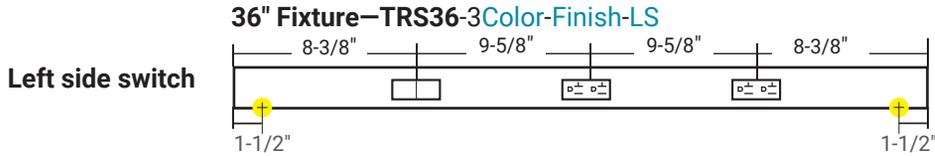

LEGEND

= Knockout (all knockouts are located on the back side of fixture and are 1-1/2" from the end)

= 20-amp standard duplex receptacle available in Black (B), Grey (G), or White (W)

= Dual single pole switch device 15-amp per switch—1/2 horsepower at 120-volt AC Switch. 12-amp max shared amperage between switches. Available in Black (B), Grey (G), or White (W)

= Switch/receptacle combo 15-amp standard receptacle single pole switch: 1/2 horsepower at 120-volt AC. Available in Black (B), Grey (G), or White (W)

Angle Power Strip


Duplex Receptacle (TR Series)



Standard profile Angle Power Strip with 20-amp tamper-resistant duplex receptacles; custom options available



24" fixture shown in Satin Nickel with Grey receptacles
TR24-2G-P-SN

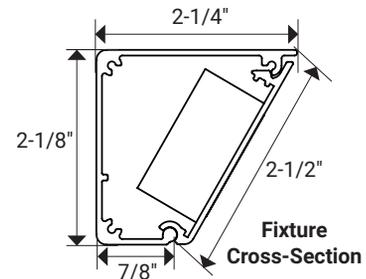

ABOUT THE PRODUCT

- Low profile: 2-1/8"
- 20-amp tamper-resistant duplex receptacles
- Available in standard and custom fixtures
- Custom options include: USB ports, switches, phone jacks, cable jacks, data ports, HDMI ports, and more: see page 52 for more options
- Simple to install fully assembled fixture with wood screws and wall anchors (included)
- Designer finishes to blend with any décor
- UL listed

APPLICATIONS

Under cabinet

Offices and computer labs

Shops and garages

For additional application help and suggestions, call Design Services at 866-848-9094

Ordering information

120-volt duplex receptacles, available in standard and custom fixture options

Part Number	Length	Number of Receptacles
TR9-1Color-P-Finish	9" (229 mm)	2
TR12-1Color-P-Finish	12" (305 mm)	2
TR18-2Color-P-Finish	18" (457 mm)	3
TR24-2Color-P-Finish	24" (610 mm)	4
TR30-2Color-P-Finish	30" (762 mm)	4
TR36-2Color-P-Finish	36" (914 mm)	4
TR42-3Color-P-Finish	42" (1067 mm)	5
TR48-3Color-P-Finish	48" (1219 mm)	5
TR60-4Color-P-Finish	60" (1524 mm)	7
TR72-4Color-P-Finish	72" (1829 mm)	8

Custom lengths, receptacle placements, and multiple custom options available.
Contact Design Services at 866-848-9094

Blue indicates dealer choice: Color indicates receptacle color and Finish indicates fixture finish color.


TECHNICAL INFORMATION

Input Voltage	120-volt AC
Rating	cULus Listed
Amps	15 amp
Mounting	Wood screws and wall anchors (included)
Wiring	12-gauge Romex for receptacles
Environment	Dry locations
Construction Material	Powder-coated aluminum
Warranty	5 years


RECEPTACLE COLOR AND COORDINATING FINISH




72" Fixture—TR72-4ColorD-P-Finish

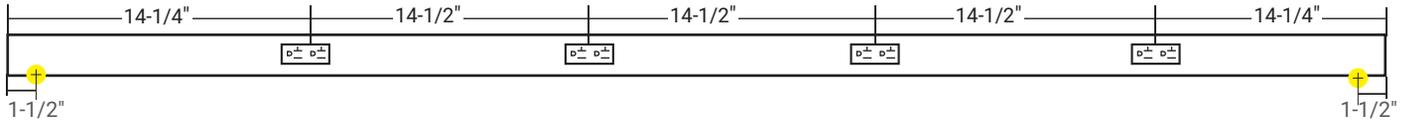


60" Fixture—TR60-4ColorD-P-Finish

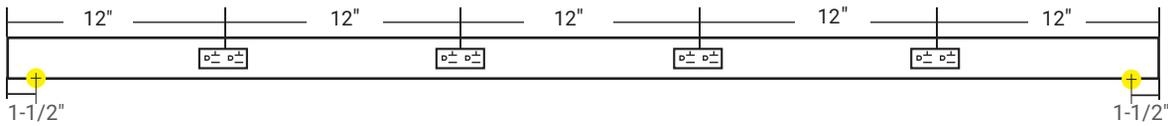


48" Fixture—TR48-3ColorD-P-Finish

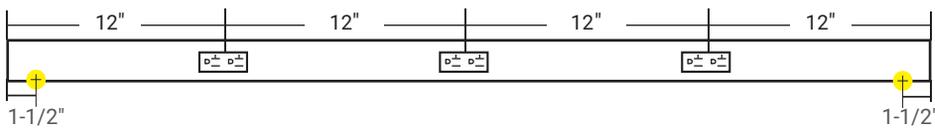


42" Fixture—TR42-3ColorD-P-Finish

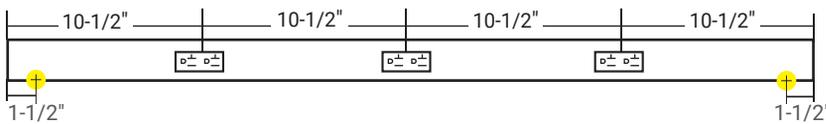


36" Fixture—TR36-2ColorD-P-Finish

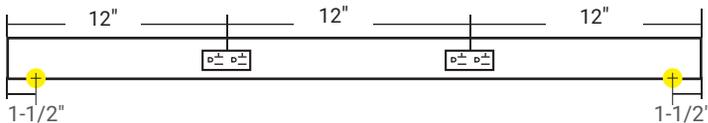


30" Fixture—TR30-2ColorD-P-Finish




24" Fixture—TR24-2ColorD-P-Finish

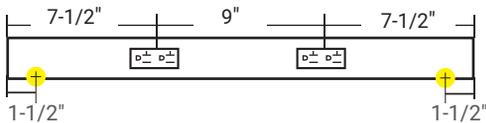


18" Fixture—TR18-2ColorD-P-Finish

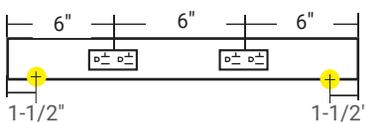

12" Fixture—TR12-1ColorD-P-Finish



9" Fixture—TR9-1ColorD-P-Finish



LEGEND

 = Knockout (all knockouts are located on the back side of fixture and are 1-1/2" from the end)

 = 20-amp standard duplex receptacle available in Black (B), Grey (G), or White (W)


CUSTOM OPTIONS/DETAILS

- Custom lengths from 7"–92" (larger sizes will have a seam when assembled)
- Additional devices (page 52)
- Custom location of devices
- Receptacles must be a minimum of 5" apart (on center)
- Receptacles must be a minimum of 3" from the end (**knockout cannot be behind device**)
- 4-1/2" of room suggested for wire entry at knockout location
- Custom charges and additional design limitations may apply—Call Design Services at 866-848-9094 for a quote, lead time, and assistance with your custom order

CUSTOM LENGTHS AND DEVICE OPTIONS

- Custom charges and additional design limitations may apply—Call Design Services at 866-848-9094
- Custom lengths to the 1/16" from 7"–90" (sizes over 90" are available but will have a seam showing)
- Additional devices and placement options available
- 4-1/2" of room suggested for wire entry at knockout location
- Receptacles must be placed a minimum of 3" from each end of the fixture to the center of a receptacle and a minimum of 5" apart (from the center of one receptacle to the center of the next)

EXAMPLE FOR RECEPTACLE PLACEMENT

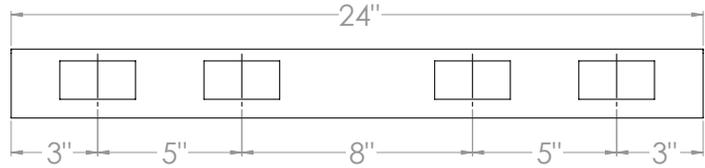

SWITCH OPTIONS TO ADD

Part Number	Description	Color
T-T-1Z-WC-RF-Color	Tunable-white wireless on/off, dimming and white light temperature changing controller—ONLY compatible with tunable-white lighting products	BK, GR, WT
T-Q-1Z-WC-RF-Color	1-Zone Uno wireless on/off and dimming controller	BK, GR, WT
T-Q-2Z-WC-RF-Color	2-Zone Duo wireless on/off and dimming controller	BK, GR, WT
T-Q-4Z-WC-RF-Color	4-Zone Quattro wireless on/off and dimming controller	BK, GR, WT
T-C-RGBWC-RF-Color	Multi-color RGB wireless on/off, dimming, and color changing controller	BK, GR, WT
TRO-SPS-Color	Decora single-pole rocker switch	BK, GR, WT
TRO-SPS-20A-Color	Decora single-pole rocker switch	B, G, W
TRO-3WS-Color	Decora 20-amp 3-way rocker switch	B, G, W
TRO-3WS-20A-Color	Decora 20-amp 3-way rocker switch	B, G, W
TRO-4WS-Color	Decora 20-amp 4-way rocker switch	B, G, W
TRO-DS-2SPS-Color	Decora 20-amp double switch	B, G, W
TRO-DS-(2)3WS-Color	Decora 20-amp double switch with two 3-way	B, W
TRO-DS-1P/3P-Color	Decora 20-amp double switch with single-pole and 3-way	B, G, W
TRO-TS-3SPS-Color	Decora 20-amp double switch with single-pole and 3-way	B, W



Tunable White Controller
T-T-1Z-WC-RF-WT



Uno 1-Zone Controller
T-Q-1Z-WC-RF-WT



Duo 2-Zone Controller
T-Q-2Z-WC-RF-WT



Quattro 4-Zone Controller
T-Q-4Z-WC-RF-WT



RGB Controller
T-C-RGBWC-RF-WT



TRO-3WS, TRO-4WS,
TRO-SPS



TRO-DS-2SPS,
TRO-DS-(2)3WS,
TRO-DS-1P/3P



TRO-TS-3SPS

RECEPTACLE OPTIONS TO ADD

Part Number	Description	Color
TRO-15A-REC-Color	15-amp tamper-resistant duplex receptacle	B, G, W
TRO-20A-REC-Color	20-amp tamper-resistant duplex receptacle	B, G, W
TRO-HG-20-REC-Color	20-amp tamper-resistant, hospital grade duplex receptacle. Call for availability on Red (R) and Orange (O)	B, G, W, R, O



TRO-15A-REC



TRO-20A-REC



TRO-HG-20-REC

COLOR KEY

- B = Black
- G = Grey
- W = White
- R = Red
- O = Orange

RECEPTACLE COMBO OPTIONS TO ADD

Part Number	Description	Color
TRO-USB/REC-Color	Combination 2.4-amp USB-A ports and 15-amp receptacle	B, G, W
TRO-CB-1P/REC-Color	Combination single-pole switch and 15-amp receptacle	B, G, W
TRO-CB-3P/REC-Color	Combination 3-way switch and 15-amp receptacle	B, G, W,



TRO-USB/REC



TRO-CB-1P/REC



TRO-CB-3P/REC

DATA CONNECTOR OPTIONS TO ADD

Part Number	Description	Color
TRO-CJ-Color	Decora-style cable jack, "F" style, for 75-Ohm coaxial cable	B, G, W
TRO-PJ-Color	Decora-style 6-conductor telephone jack	B, G, W
TRO-HDMI-Color	Decora HDMI port connector	W



TRO-CJ



TRO-PJ



TRO-HDMI

PORT FRAME OPTIONS TO ADD

Part Number	Description	Color
TRO-2Port-Color	Decora insert for 2 snap-in connectors for voice, data, & video	B, G, W
TRO-3Port-Color	Decora insert for 3 snap-in connectors for voice, data, & video	B, G, W
TRO-4Port-Color	Decora insert for 4 snap-in connectors for voice, data, & video	B, G, W
TRO-6Port-Color	Decora insert for 6 snap-in connectors for voice, data, & video	B, G, W



TRO-2PORT



TRO-3PORT



TRO-4PORT



TRO-6PORT

SNAP-IN DATA CONNECTOR OPTIONS TO ADD

Part Number	Description	Color
TRO-CON-Blank-Color	Blank insert used to cover up any unused opening in any port frames	B, G, W
TRO-CON-Blank-Color	Snap-in data cat6, 8-conductor channel rated connector. 250MHZ	B, G, W
TRO-CON-CJ-Color	Snap-in cable jack	B, G, W
TRO-CON-PJ-8-Color	8-conductor USOC voice grade phone (jack) connector	B, G, W
TRO-CON-HDMI-Color	HDMI feed through quick port connector	B, W



TRO-CON-BLANK



TRO-CON-CAT6



TRO-CON-CJ



TRO-CON-PJ



TRO-CON-HDMI

INTEGRAL POWER SUPPLIES USED WITH LED LIGHTING

Part Number	Description
TRO-LPV-20W-12V	12-volt DC 20-watt LED power supply (use with wireless dimming system)
TRO-LPV-35W-12V	12-volt DC 35-watt LED power supply (use with wireless dimming system)



TRO-LPV

COLOR KEY

B = Black
G = Grey
W = White



LOOKING FOR AN ANGLE POWER STRIP?

This selection guide will walk through how to select an Angle Power Strip perfect for any job. Don't see what you're looking for in the standard options? **Contact Design Services at 866-848-9094 or email DesignAndSupport@TaskLighting.com** for help on customizing a Slim Profile (APT Series) or Duplex Receptacle (TR Series) Angle Power Strip.

STEP 1 Do you want Single or Duplex Receptacles?

Things to keep in mind when selecting receptacle style: The Duplex Receptacle (TR Series) offers a wider variety of custom options.

Single Receptacle

APT Series

- Slim profile
- Multiple standard lengths and 15-amp receptacles
- Customize fixture with additional receptacles and switches, custom lengths, and receptacle/switch placement—call Design Services at 866-848-9094 for custom orders



15-amp
Single Receptacle

Duplex Receptacle

TR Series

- Multiple standard lengths and 20-amp receptacles
- Customize fixture with additional 20-amp receptacles and switches, custom lengths, receptacle/switch placement, and more see page 50 for more options—call Design Services at 866-848-9094 for custom orders



20-amp
Duplex
Receptacle

TR-USB Series

- Available in standard fixtures only—for customization, see the TR Series and custom options on page 50
- One 15-amp USB-A/receptacle combo located on left side
- Duplex receptacle quantity and placement determined by length of fixture



15-amp
USB-A/
Receptacle
Combo



20-amp
Duplex
Receptacle

TRS Series

- Available in standard fixtures only—for customization, see the TR Series and custom options on page 50
- One 15-amp switch receptacle combo in 9" and 12" fixtures
- One 15-amp dual switch device in 18"–36" fixtures. Select right or left side for switch location
- Duplex receptacle quantity and placement determined by length of fixture



15-amp
Switch/
Receptacle
Combo



15-amp
Dual
Switch



20-amp
Duplex
Receptacle

STEP 2 Select the desired standard length for the fixture

Things to keep in mind when selecting fixture length: Angle Power Strip Fixtures can be mounted two ways: flush under the cabinet or recessed under the cabinet reveal.




Scan to view sizing chart
<https://delivr.com/2axfm>



APT Series


- 9" (229 mm) **APT9-2Color-P-Finish-Position***
- 12" (305 mm) **APT12-2Color-P-Finish-Position***
- 18" (457 mm) **APT18-3Color-P-Finish-Position***
- 24" (610 mm) **APT24-4Color-P-Finish**
- 30" (762 mm) **APT30-4Color-P-Finish**
- 36" (914 mm) **APT36-4Color-P-Finish**
- 42" (1067 mm) **APT42-5Color-P-Finish**
- 48" (1219 mm) **APT48-5Color-P-Finish**
- 60" (1524 mm) **APT60-7Color-P-Finish**
- 72" (1829 mm) **APT72-8Color-P-Finish**

*Position indicates Left (L) or Right (R) side wire entry

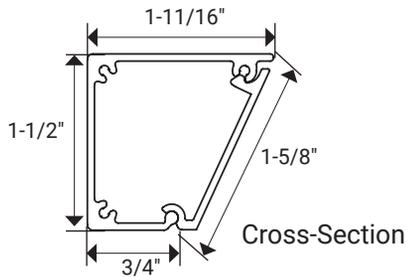

TR-USB Series


- 9" (229 mm) **TRU9-1ColorD-P-Finish**
- 12" (305 mm) **TRU12-1ColorD-P-Finish**
- 18" (457 mm) **TRU18-2ColorD-P-Finish**
- 24" (610 mm) **TRU24-2ColorD-P-Finish**
- 30" (762 mm) **TRU30-2ColorD-P-Finish**
- 36" (914 mm) **TRU36-2ColorD-P-Finish**
- 42" (1067 mm) **TRU42-3ColorD-P-Finish**
- 48" (1219 mm) **TRU48-3ColorD-P-Finish**
- 60" (1524 mm) **TRU60-4ColorD-P-Finish**
- 72" (1829 mm) **TRU72-4ColorD-P-Finish**

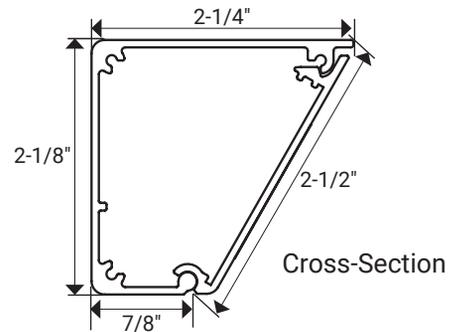

TRS Series


- 9" (229 mm) **TRS9-1Color-Finish**
- 12" (305 mm) **TRS12-1Color-Finish**
- 18" (457 mm) **TRS18-2Color-Finish-Switch***
- 24" (610 mm) **TRS24-3Color-Finish-Switch***
- 30" (762 mm) **TRS30-3Color-Finish-Switch***
- 36" (914 mm) **TRS36-3Color-Finish-Switch***

*Switch indicates Left Side (LS) or Right Side (RS) switch location

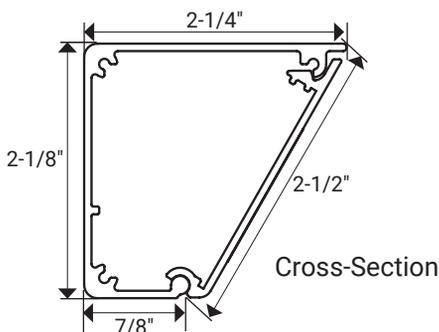

TR Series

- 9" (229 mm) **TR9-1ColorD-P-Finish**
- 12" (305 mm) **TR12-1ColorD-P-Finish**
- 18" (457 mm) **TR18-2ColorD-P-Finish**
- 24" (610 mm) **TR24-2ColorD-P-Finish**
- 30" (762 mm) **TR30-2ColorD-P-Finish**
- 36" (914 mm) **TR36-2ColorD-P-Finish**
- 42" (1067 mm) **TR42-3ColorD-P-Finish**
- 48" (1219 mm) **TR48-3ColorD-P-Finish**
- 60" (1524 mm) **TR60-4ColorD-P-Finish**
- 72" (1829 mm) **TR72-4ColorD-P-Finish**

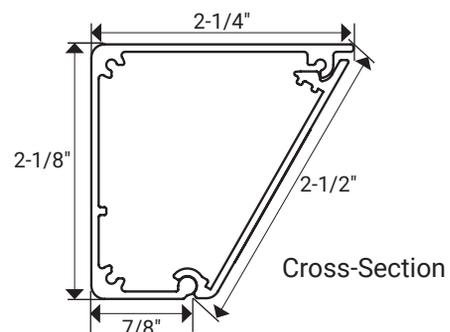

STEP 3 Select the finish option with coordinating receptacle color

Things to keep in mind when selecting a finish: blend with backsplash color to reduce fixture visibility, coordinate with cabinet color, or match nearby hardware.

APT Series

Finish options with coordinating receptacle color (24" fixture shown)

NOTE: If a different finish/receptacle color pairing is desired, call Design Services at 866-848-9094.



Black (B) receptacles, Black (BK) finish



Black (B) receptacles, Bronze (BZ) finish



Grey (G) receptacles, Satin Nickel (SN) finish



White (W) receptacles, White (WT) finish

TR-USB Series

Finish options with coordinating USB/receptacle color (24" fixture shown)



Black (B) receptacles, Black (BK) finish



Black (B) receptacles, Bronze (BZ) finish



Grey (G) receptacles, Satin Nickel (SN) finish



White (W) receptacles, White (WT) finish

TRS Series

Finish options with coordinating switch/receptacle color (24" fixture shown with left side switch)



Black (B) receptacles, Black (BK) finish



Black (B) receptacles, Bronze (BZ) finish



Grey (G) receptacles, Satin Nickel (SN) finish



White (W) receptacles, White (WT) finish

TR Series

Finish options with coordinating receptacle color (24" fixture shown)

NOTE: If a different finish/receptacle color pairing is desired, call Design Services at 866-848-9094.



Black (B) receptacles, Black (BK) finish



Black (B) receptacles, Bronze (BZ) finish



Grey (G) receptacles, Satin Nickel (SN) finish




White (W) receptacles, White (WT) finish


Examples of Angle Power Strip part numbers

Things to keep in mind when selecting a finish: product options, described in Steps 1–3, are indicated in blue. Coordinating receptacle color must match fixture finish in Step 3, otherwise it is a custom fixture.


EXAMPLE APT PART NUMBER

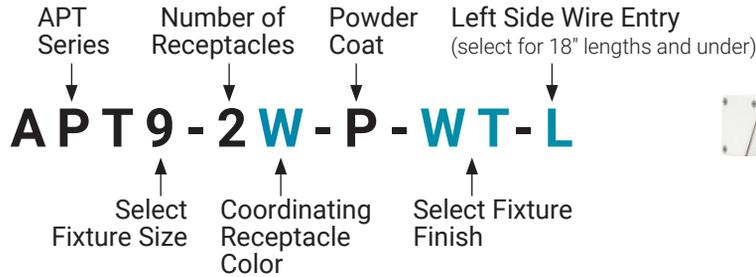

EXAMPLE TR-USB PART NUMBER

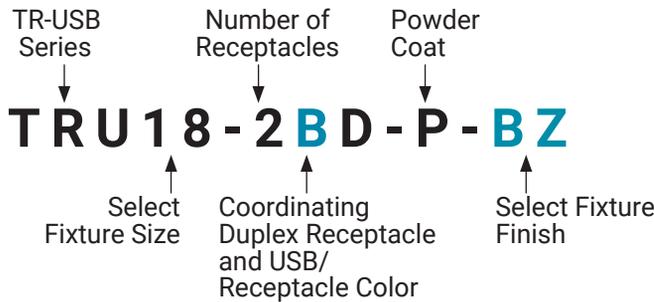

EXAMPLE TRS PART NUMBER

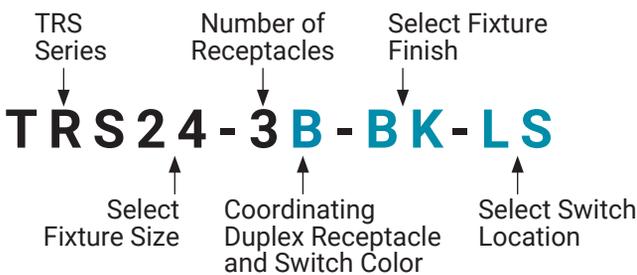

EXAMPLE TR PART NUMBER

