

NorthPoint Closets Assembly Instructions

Table of Contents

<u>Floor Mounted Unit — Assembly Instructions</u>	Page 2
<u>Short Floor Mounted Unit — Assembly Instructions</u>	Page 6
<u>Corner Floor Mounted Unit — Assembly Instructions</u>	Page 10
<u>Wall Mounted Unit — Assembly Instructions</u>	Page 15
<u>DBX and Slides — Assembly Instructions</u>	Page 19
<u>Disassembly Instructions</u>	Page 22

Click a title above to jump to that section.



ASSEMBLY INSTRUCTIONS FOR FLOOR-MOUNTED UNITS

Scan to watch the assembly video
<https://delivr.com/262jj>

WARNING

Keep area free of children and pets while assembling and installing.

CAUTION

This product is heavy. Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit. Be mindful of your fingers while assembling. Ensure the area is clear before snapping the product into place to avoid any potential injuries.

IMPORTANT

- Read instructions in their entirety before you start.
- Unwrap all packaging materials and place the components on a clean surface to protect them from damage.
- Carefully check to ensure that you have all the parts before beginning assembly.
- Due to the size of this product, we recommend that it is assembled in or near the room intended for use.

BEFORE BEGINNING ASSEMBLY

Determine the number of people required to assemble: 1 person for units shorter than 48", 2 persons for units 48" and taller



TOOLS NECESSARY

Rubber mallet, screwdriver

PARTS IDENTIFICATION

Part quantities will vary depending on unit size.


A	Side Panels (Left & Right)
B	Fixed Shelves
C	Fixed Shelf Support Rails
D	Middle Support Rail (not included in all units)
E	Toe Kick
F	I-Beam
G	Closet Rod Mounting Brackets and #6 x 5/8" Wood Screws (sold separately)
H	Oval Closet Rod (sold separately)
I	Shelf Pins
J	Adjustable Shelves
K	#8 x 2-5/8" Truss Head Wood Screws
L	Wall Anchors & Screws

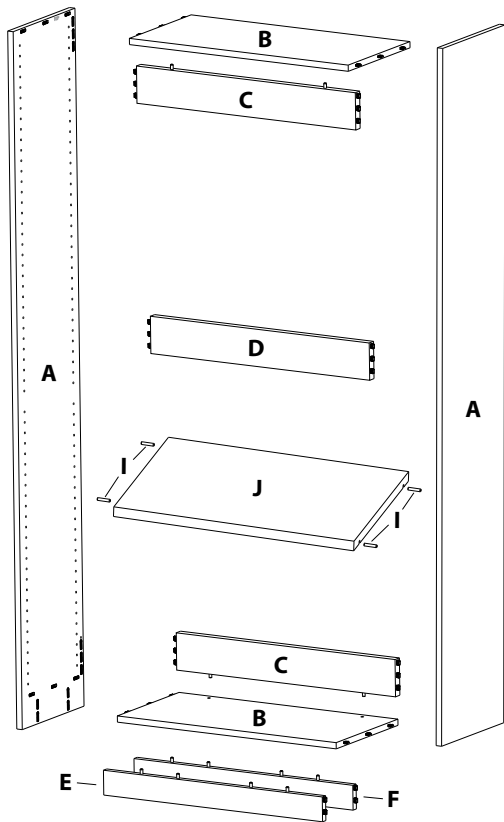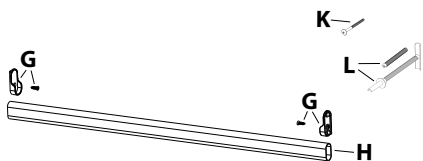


QUICKSNAP™ CONNECTORS

Carefully review the instructions and ensure proper alignment during assembly. All connectors must line up when assembling. Depending on the closet type, some may require dowels. Dowels must line up when assembling. Additional connectors are included for replacement if needed during installation.


BEFORE INSTALLATION, ENSURE ALL CONNECTORS ARE LOCKED IN PLACE.

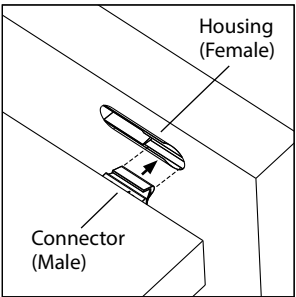

1. Push connector into housing until panels are flush.

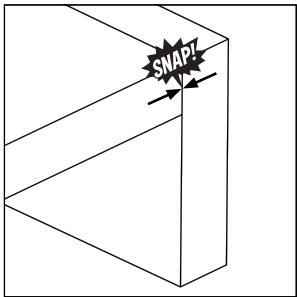


2. Make sure there is no gap between the panels.

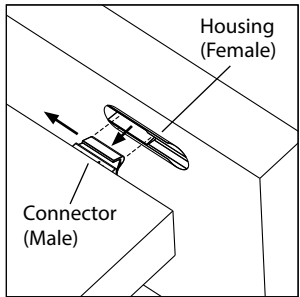

3. To disassemble, slide the panel with the connector back, then pull the panels apart.

For full disassembly instructions, visit www.NorthPointClosets.com


Step 1: Prepare Fixed Shelves

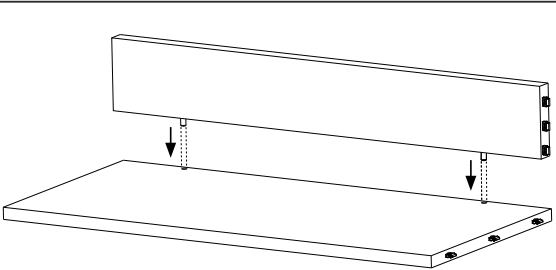

Secure the (C) **Fixed Shelf Support Rail** to the (B) **Fixed Shelf** using the pre-installed wood dowels. Repeat this step as needed for all fixed shelves included with unit.


Note: Floor-mounted hanging units do not include a fixed middle shelf; instead, they are equipped with a (D) **Middle Support Rail**, which can be identified by the lack of pre-installed dowels. Before installing, check that the male connectors are aligned with the female connectors on the (A) **Side Panels**. The bottom will have a noticeable gap between the connectors and the edge of the support rail.

Step 2: Attach Toe Kick and I-Beam

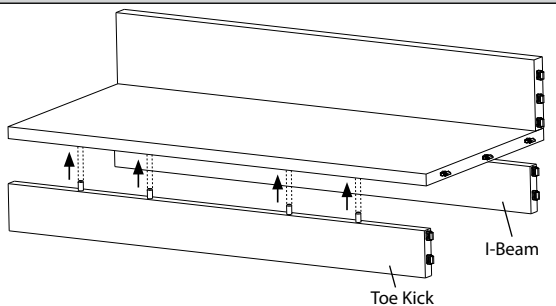

On the (B) **Fixed Shelf** attaching to the bottom of the unit, secure the (E) **Toe Kick** and the (F) **I-Beam** to the bottom of the the shelf with the pre-installed wood dowels.

Step 3: Snap Fixed Shelves & Support Rails to Panels

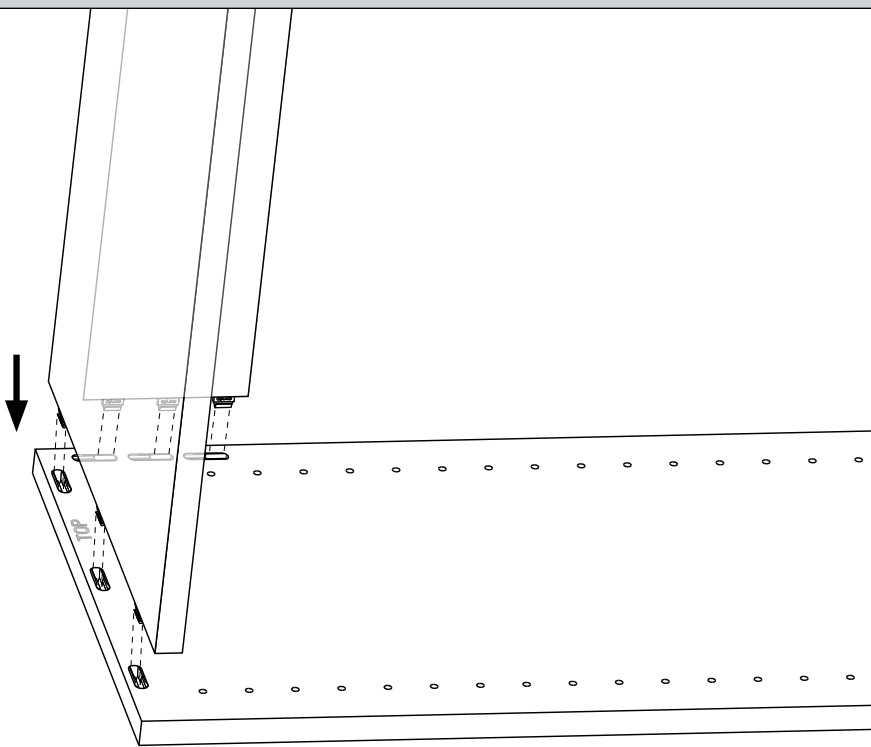

Position the left or right **(A) Side Panel** flat on the ground with the female housings facing upward. Locate the top of the panel.

At the top of the panel, align the male connectors on the **(B) Fixed Shelf** and the male connectors on the **(C) Fixed Shelf Support Rail** with the corresponding female housings on the **(A) Side Panel**. Once properly aligned, snap the connectors securely into place. Repeat this process for the middle (if applicable) and bottom fixed shelves.


If applicable, align the male connectors on the **(D) Middle Support Rail** with the corresponding female housings on the **(A) Side Panel** and snap the connectors securely into place.

Note: Depending on your closet unit configuration, the shelf and rail will attach to the side panels with the support rail either above or below the fixed shelf. Use QuickSnap™ connector locations to guide proper placement.

Take the opposite **(A) Side Panel** and align the female housings with the male connectors on the **(B) Fixed Shelf**, **(C) Fixed Shelf Support Rail**, and (if applicable) **(D) Middle Support Rail**. Once properly aligned, snap the **(A) Side Panel** securely into place.

Once assembled, gently lay the unit on its back so the front is facing up, then carefully lift it so it is standing upright. Use 2 people for units over 48”.

Step 4: Attach Closet Rod (if applicable)

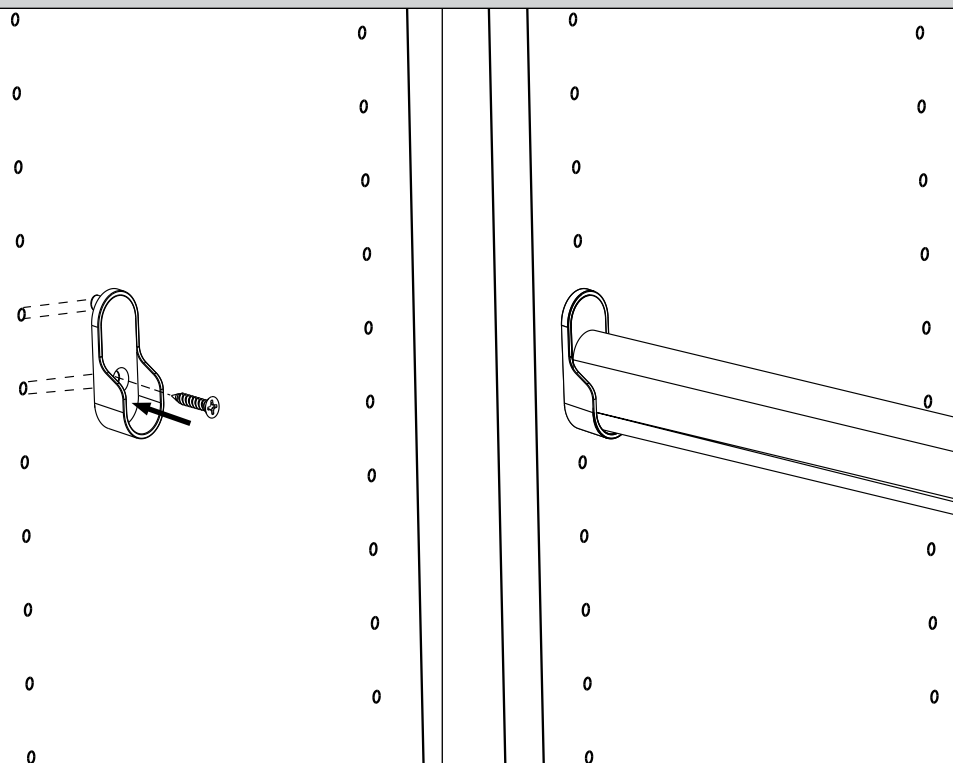

Attach **(G) Closet Rod Mounting Bracket** where desired and secure with the **(G) #6 x 5/8” Wood Screw** provided. Repeat for the other side. Once the brackets are securely in place, slide the **(H) Oval Closet Rod** into the brackets.

Step 5: Install Adjustable Shelves

After the unit is secured to the wall, place **(J) Adjustable Shelves** where desired using **(I) Shelf Pins** to hold in place.

See instructions on next page for installation to the wall. Unit MUST be affixed to the wall.

SAFETY INFORMATION AND WARNINGS

WARRANTY

See warranty and terms and conditions for more details.

ATTENTION

- Please inspect the product upon arrival and report any damage immediately.
- This product is designed for indoor use only.
- All measurements and dimensions provided are approximate. Please verify dimensions and compatibility with your space before assembly.
- Two-person assembly and installation is recommended for units 48" and taller.

WARNING

- Qualified professional installation is recommended. Manufacturer is not liable for any damages or injury caused by homeowner assembly or improper installation. Please see warranty and terms and conditions.
- Do not exceed recommended weight limits, which are specified in the unit specifications. Exceeding these limits may result in structural failure or injury.
- Be mindful of your fingers while assembling. Ensure the area is clear before snapping the product into place to avoid any potential injuries.

- Ensure all components are secured to wall before use. Failure to follow the assembly and installation instructions may result in injury or damage.
- Keep small parts and packaging materials away from children and pets to avoid choking hazards.
- Some parts may have sharp points or edges in the unassembled state. Take care when handling pieces to avoid injury.
- Keep area free of children and pets while assembling and installing.
- This product is heavy. Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit.

MODIFICATIONS

Modifications or alterations to this product are not recommended and may void the warranty. Our closet systems are designed and tested for structural integrity in their original sizes and configurations. Unauthorized changes—such as cutting, drilling, or routing—can compromise performance and may result in damage, structural failure, or injury.

If modifications are necessary (e.g., to accommodate lighting), they must be done with care and at the customer's own risk. Please consult the warranty documentation for full details. The manufacturer is not liable for any injuries or damages arising from modified or altered units.

INSTALLATION: PREPARING AND INSTALLING

PREPARE YOUR SPACE

1. Prepare Walls
 - Make sure walls are clean and free of obstruction before installation.
2. Survey Wall Structure
 - Survey the wall structure, ensuring that you can fasten to wall studs. Make sure there are no wires and pipes that may interfere. Don't drill, cut, or fasten anything into areas of the wall where there might be hidden systems like electrical wires, water pipes, gas lines, or HVAC ducts.

TOOLS NEEDED

Stud finder, level, drill, stud screws, wall anchors and screws
(Provided stud screws and anchors are strongly recommended. Manufacturer is not liable for any damage or injury resulting from the use of alternative hardware or installation materials.)

INSTALL


NOTE: We strongly recommend having two people perform installation.

1. IMPORTANT: Locate Wall Studs
 - Locate wall studs and mark their positions.
2. Position Unit on Wall
 - Position the unit on the wall, ensuring that the unit will be attached to studs.



NOTE: Unit must be attached to at minimum one stud. For the most secure installation, attach unit to two or more studs, depending on the width of the unit. For narrow units, it is likely only one stud will overlap the unit. In that case, use included wall anchors to attach the other side of the unit to the wall. One wall anchor per support rail is required for secure installation.

3. Drill Holes for Primary Support Screws
 - Drill holes for **(K) #8 x 5/8" Truss Head Wood Screws** into all support rails at each stud.
NOTE: Drill bits must be sized appropriately for the screws being used. Follow manufacturer instructions.

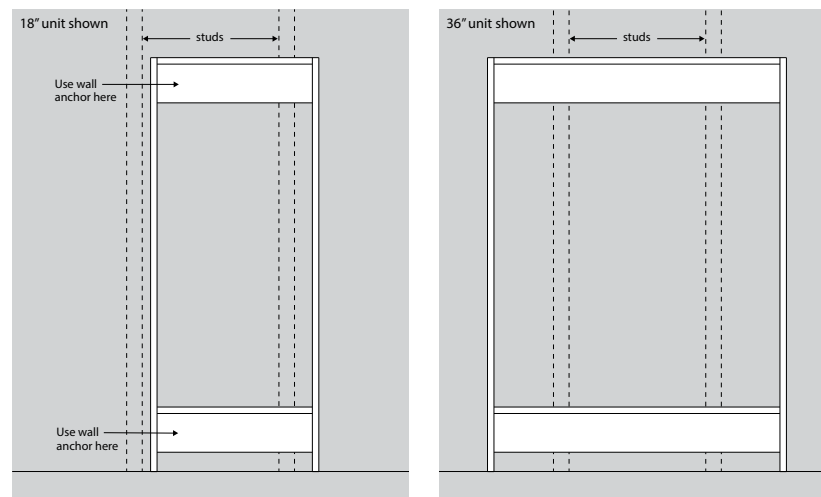


4. Drill Holes for Secondary Support Anchors
 - Drill holes for **(L) Wall Anchors** into all support rails at any location that extends more than 8" past a stud. **NOTE:** Drill bits must be sized appropriately for the anchors being used. Follow manufacturer instructions on the back of this sheet.
5. Attach Secondary Support Anchors to Wall
 - Reposition the unit on the wall, ensuring it is level and properly aligned with the studs. Secure the support rails to the wall using included **(K) #8 x 2-5/8" Truss Head Wood Screws** to attach to studs and/or included 1/4" x 2-1/2" screws for wall anchors. Double-check the stability of the entire unit, ensuring it is securely attached and all components are properly installed.
6. Strongly recommended (optional): Secure Units to Each Other
 - Ensure everything is level and securely in place. Then secure the side panels of the units together using screws (we recommend #6 x 1" coarse thread drywall screws). Double-check all screws and connections to ensure the system is stable.

Anchor Installation Guide









1

Drill through closet support panel and drywall

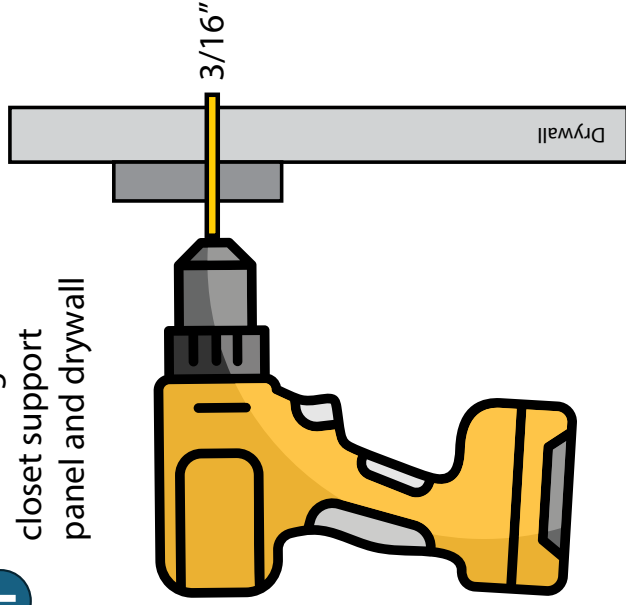

2

Remove closet support panel and drill drywall

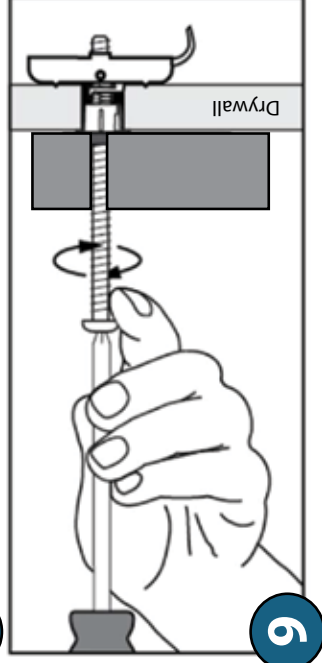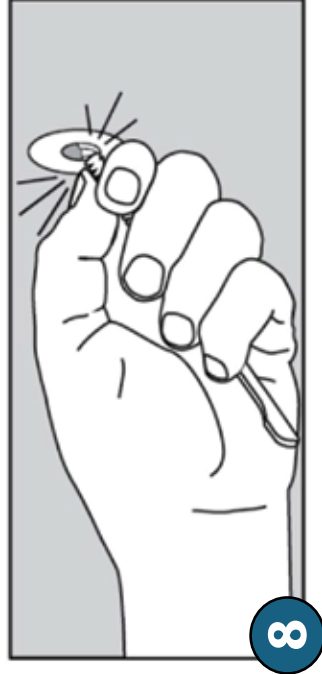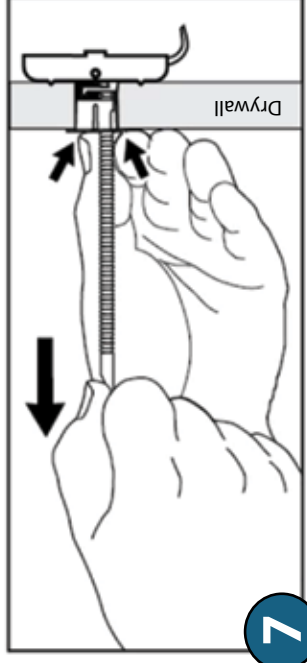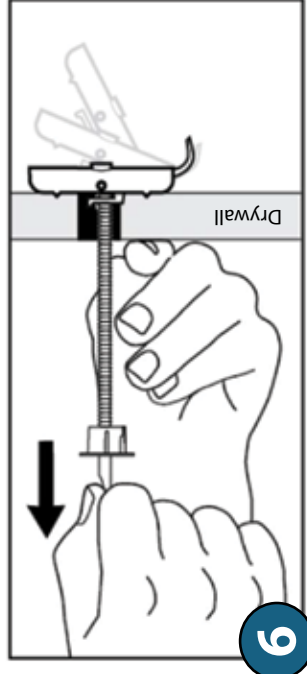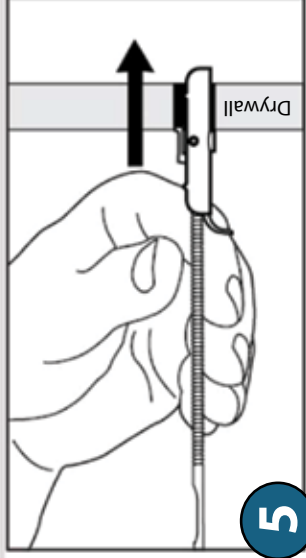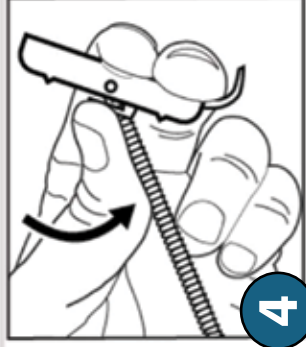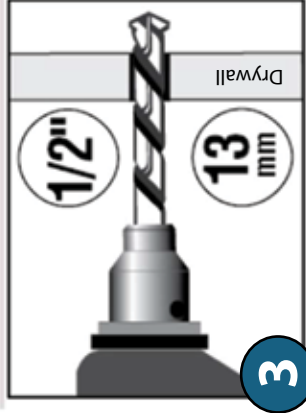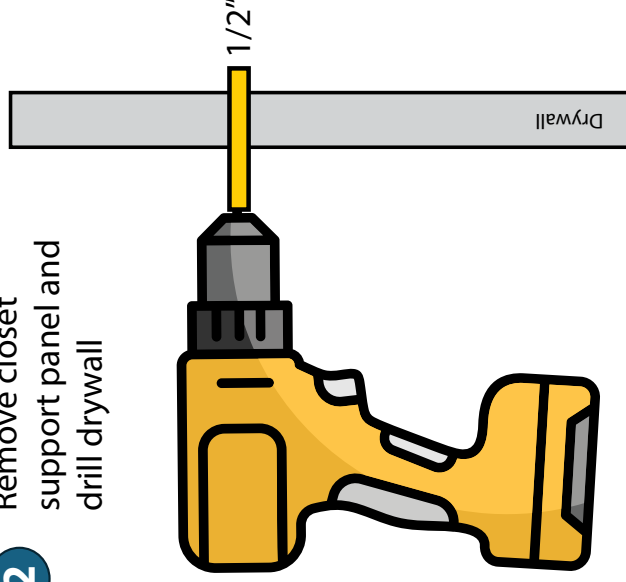

Do not use for mounting televisions. Anchors hold up to 137 lbs for 1/2" drywall.
Warning: This product can expose you to chemicals including nickel, lead, which are unknown to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov



Scan to view
 installation video.

<https://delivr.com/28vm6>

ASSEMBLY INSTRUCTIONS FOR SHORT FLOOR-MOUNTED UNITS



WARNING

Keep area free of children and pets while assembling and installing.

CAUTION

This product is heavy. Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit. Be mindful of your fingers while assembling. Ensure the area is clear before snapping the product into place to avoid any potential injuries.

IMPORTANT

- Read instructions in their entirety before you start.
- Unwrap all packaging materials and place the components on a clean surface to protect them from damage.
- Carefully check to ensure that you have all the parts before beginning assembly.
- Due to the size of this product, we recommend that it is assembled in or near the room intended for use.

BEFORE BEGINNING ASSEMBLY

Determine the number of people required to assemble: 1 person for units shorter than 48", 2 persons for units 48" and taller


TOOLS NECESSARY

Rubber mallet, screwdriver

PARTS IDENTIFICATION

Part quantities will vary depending on unit size.


A	Side Panels (Left & Right)
B	Fixed Shelves
C	Back Panel
D	Toe Kick
E	I-Beam
F	Shelf Pins (not included in all units)
G	Adjustable Shelves (not included in all units)
H	#8 x 2-5/8" Truss Head Wood Screws
I	Wall Anchors & Screws

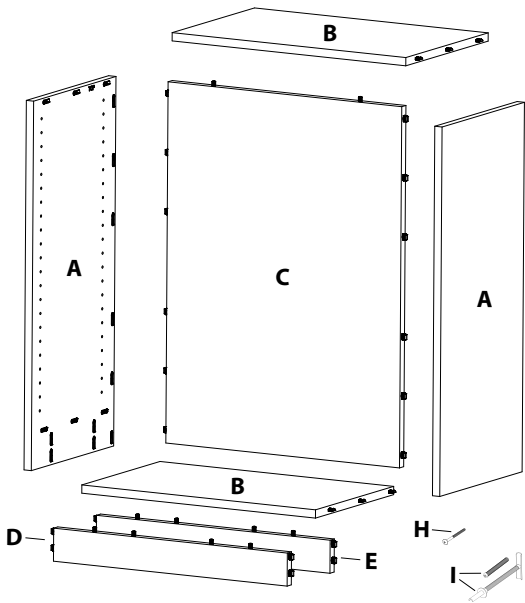


QUICKSNAP™ CONNECTORS

Carefully review the instructions and ensure proper alignment during assembly. All connectors must line up when assembling. Depending on the closet type, some may require dowels. Dowels must line up when assembling. Additional connectors are included for replacement if needed during installation.


BEFORE INSTALLATION, ENSURE ALL CONNECTORS ARE LOCKED IN PLACE.

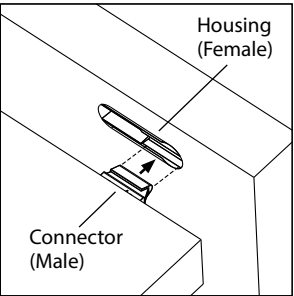

1. Push connector into housing until panels are flush.

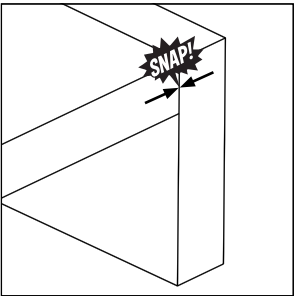


2. Make sure there is no gap between the panels.

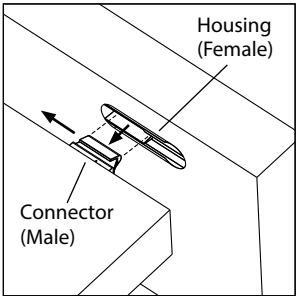

3. To disassemble, slide the panel with the connector back, then pull the panels apart.


For full disassembly instructions, visit www.NorthPointClosets.com

Step 1: Prepare Fixed Shelves

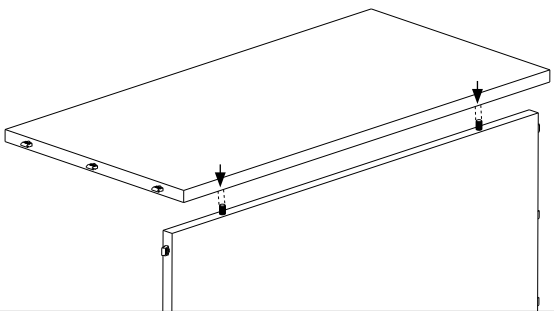


Secure the (C) **Back Panel** to the (B) **Fixed Shelf** using the pre-installed wood dowels.

Step 2: Attach Toe Kick and I-Beam

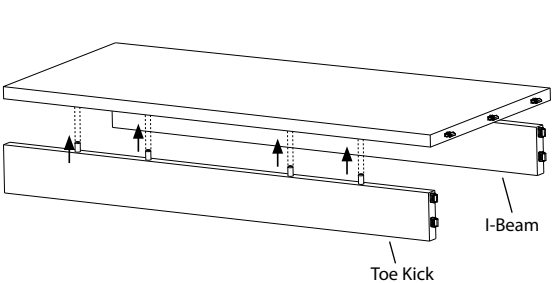

On the (B) **Fixed Shelf** attaching to the bottom of the unit, secure the (D) **Toe Kick** and the (E) **I-Beam** to the bottom of the the shelf with the pre-installed wood dowels.

Step 3: Snap Fixed Shelves & Back Panel to Side Panels

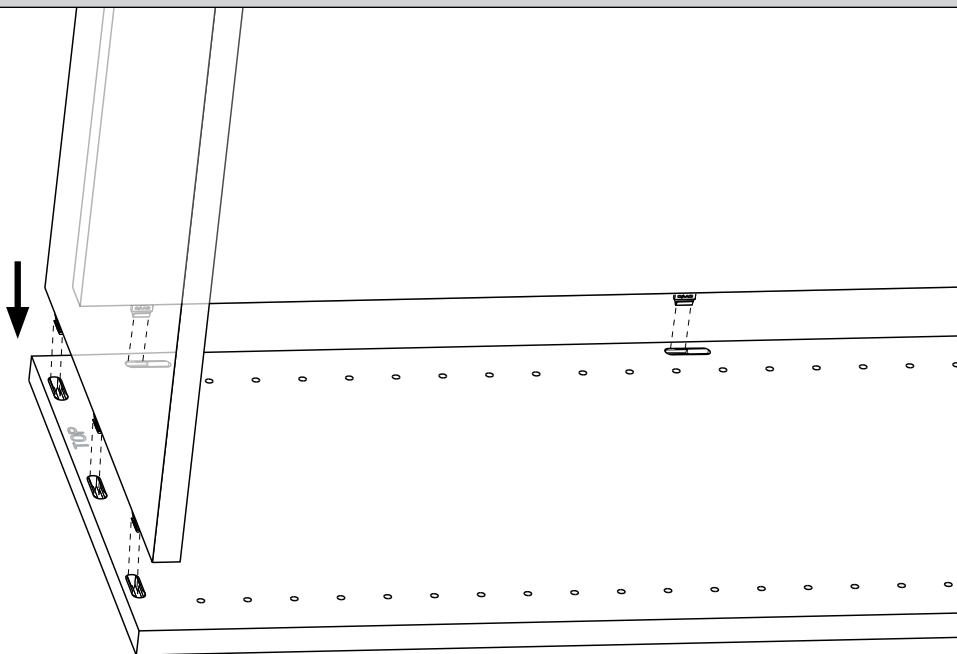

Position the left or right **(A) Side Panel** flat on the ground with the female housings facing upward. Locate the top of the panel.

At the top of the panel, align the male connectors on the **(B) Fixed Shelf** and the male connectors on the **(C) Back Panel** with the corresponding female housings on the **(A) Side Panel**. Once properly aligned, snap the connectors securely into place.

At the bottom, align the male connectors on the **(B) Fixed Shelf** and the male connectors on the **(D) Toe Kick** and **(E) I-Beam** with the female housings on the **(A) Side Panel**. Once properly aligned, snap the connectors securely into place.

Take the opposite **(A) Side Panel** and align the female housings with the male connectors on the **(B) Fixed Shelf** at the top and bottom, the **(C) Back Panel**, **(D) Toe Kick**, and **(E) I-Beam**. Once properly aligned, snap the **(A) Side Panel** securely into place.

Once assembled, gently lay the unit on its back so the front is facing up, then carefully lift it so it is standing upright. Use 2 people for units over 48".

Step 4: Install Adjustable Shelves (if applicable)

After the unit is secured to the wall, place **(G) Adjustable Shelves** where desired using **(F) Shelf Pins** to hold in place.

NOTE: Some closet unit configurations come with drawers. Please see separate instructions sheet for drawer box assembly and installation instructions.

See instructions on next page for installation to the wall. Unit MUST be affixed to the wall.

SAFETY INFORMATION AND WARNINGS

WARRANTY

See warranty and terms and conditions for more details.

ATTENTION

- Please inspect the product upon arrival and report any damage immediately.
- This product is designed for indoor use only.
- All measurements and dimensions provided are approximate. Please verify dimensions and compatibility with your space before assembly.
- Two-person assembly and installation is recommended for units 48" and taller.

WARNING

- Qualified professional installation is recommended. Manufacturer is not liable for any damages or injury caused by homeowner assembly or improper installation. Please see warranty and terms and conditions.
- Do not exceed recommended weight limits, which are specified in the unit specifications. Exceeding these limits may result in structural failure or injury.
- Be mindful of your fingers while assembling. Ensure the area is clear before snapping the product into place to avoid any potential injuries.

- Ensure all components are secured to wall before use. Failure to follow the assembly and installation instructions may result in injury or damage.
- Keep small parts and packaging materials away from children and pets to avoid choking hazards.
- Some parts may have sharp points or edges in the unassembled state. Take care when handling pieces to avoid injury.
- Keep area free of children and pets while assembling and installing.
- This product is heavy. Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit.

MODIFICATIONS

Modifications or alterations to this product are not recommended and may void the warranty. Our closet systems are designed and tested for structural integrity in their original sizes and configurations. Unauthorized changes—such as cutting, drilling, or routing—can compromise performance and may result in damage, structural failure, or injury.

If modifications are necessary (e.g., to accommodate lighting), they must be done with care and at the customer's own risk. Please consult the warranty documentation for full details. The manufacturer is not liable for any injuries or damages arising from modified or altered units.

INSTALLATION: PREPARING AND INSTALLING

PREPARE YOUR SPACE

1. Prepare Walls
 - Make sure walls are clean and free of obstruction before installation.
2. Survey Wall Structure
 - Survey the wall structure, ensuring that you can fasten to wall studs. Make sure there are no wires and pipes that may interfere. Don't drill, cut, or fasten anything into areas of the wall where there might be hidden systems like electrical wires, water pipes, gas lines, or HVAC ducts.

TOOLS NEEDED

Stud finder, level, drill, stud screws, wall anchors and screws
(Provided stud screws and anchors are strongly recommended. Manufacturer is not liable for any damage or injury resulting from the use of alternative hardware or installation materials.)

INSTALL


NOTE: We strongly recommend having two people perform installation.

1. **IMPORTANT:** Locate Wall Studs
 - Locate wall studs and mark their positions.
2. Position Unit on Wall
 - Position the unit on the wall, ensuring that the unit will be attached to studs.



NOTE: Unit must be attached to at minimum one stud. For the most secure installation, attach unit to two or more studs, depending on the width of the unit. For narrow units, it is likely only one stud will overlap the unit. In that case, use included wall anchors to attach the other side of the unit to the wall. One wall anchor per support rail is required for secure installation.

3. Drill Holes for Primary Support Screws
 - Drill holes for **(H) #8 x 2-5/8" Truss Head Wood Screws** into all support rails at each stud. **NOTE:** Drill bits must be sized appropriately for the screws being used. Follow manufacturer instructions.

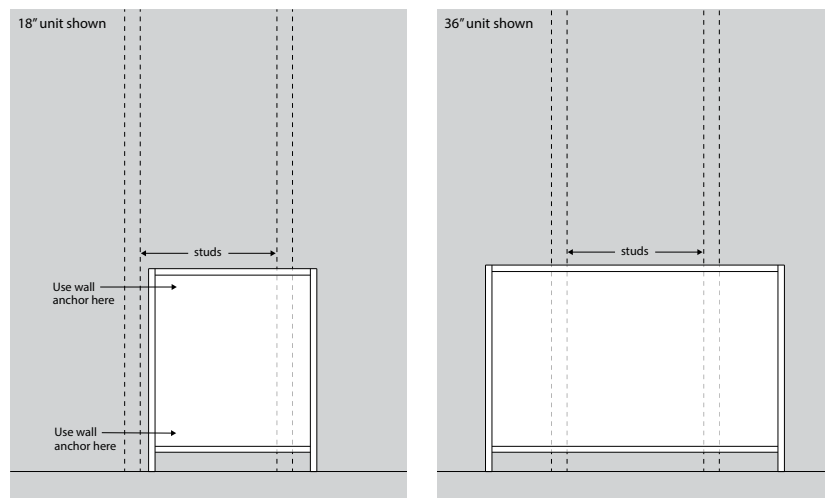


4. Drill Holes for Secondary Support Anchors
 - Drill holes for **(I) Wall Anchors** into all support rails at any location that extends more than 8" past a stud. **NOTE:** Drill bits must be sized appropriately for the anchors being used. Follow manufacturer instructions on the back of this sheet.
5. Attach Secondary Support Anchors to Wall
 - Reposition the unit on the wall, ensuring it is level and properly aligned with the studs. Secure the support rails to the wall using included **(H) #8 x 2-5/8" Truss Head Wood Screws** to attach to studs and/or included 1/4" x 2-1/2" screws for wall anchors. Double-check the stability of the entire unit, ensuring it is securely attached and all components are properly installed.
6. Strongly recommended (optional): Secure Units to Each Other
 - Ensure everything is level and securely in place. Then secure the side panels of the units together using screws (we recommend #6 x 1" coarse thread drywall screws). Double-check all screws and connections to ensure the system is stable.

Anchor Installation Guide



1

Drill through closet support panel and drywall

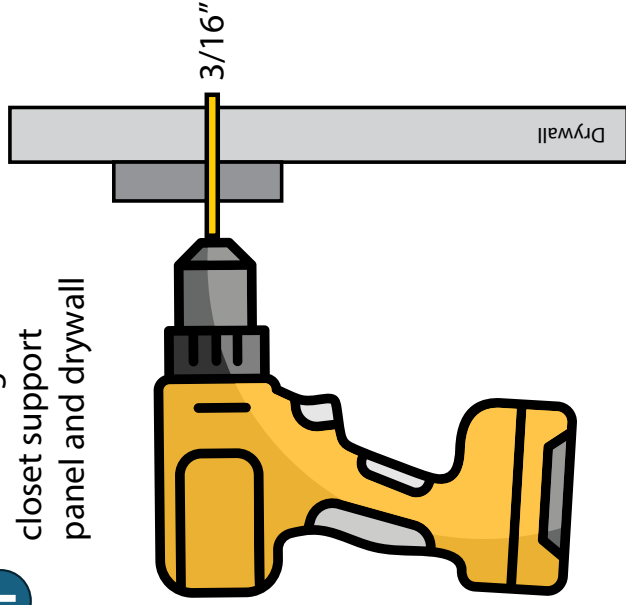


2


Remove closet support panel and drill drywall

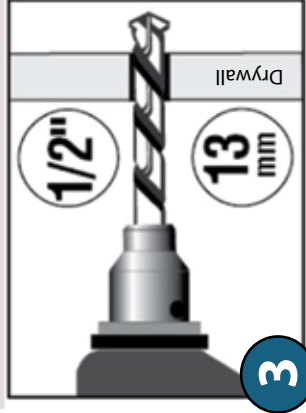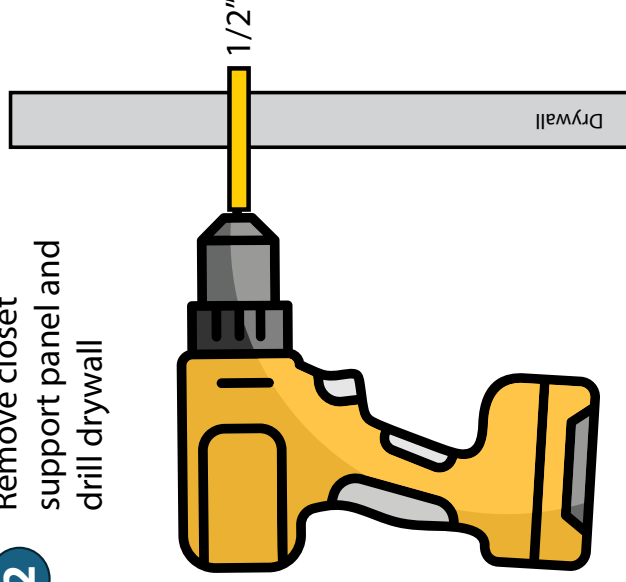


3




4

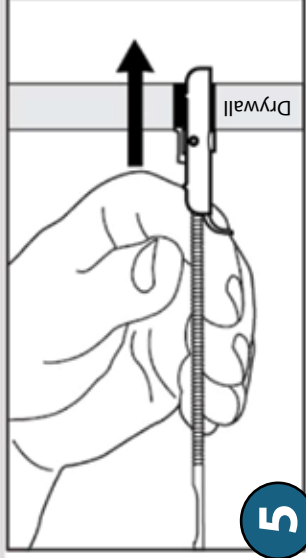


5

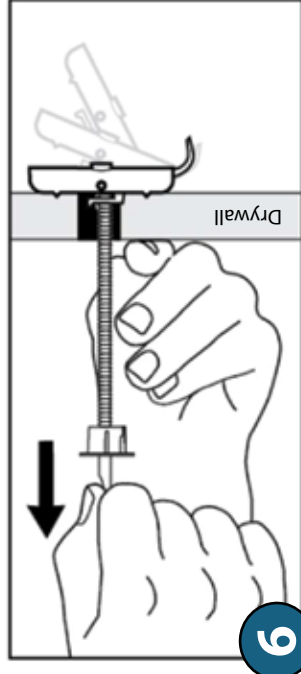


6

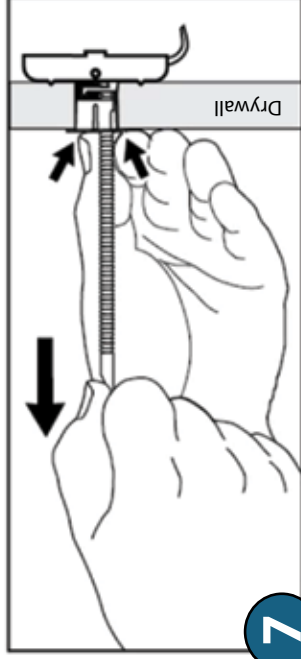

7

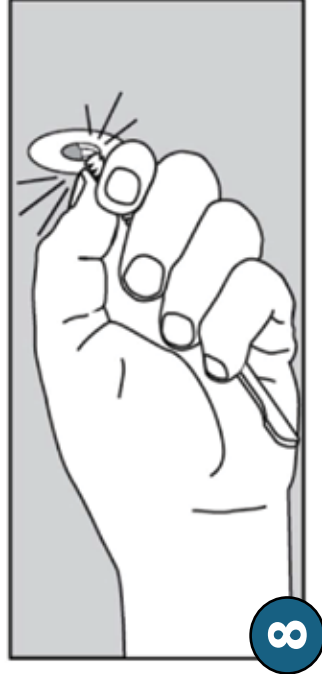

8

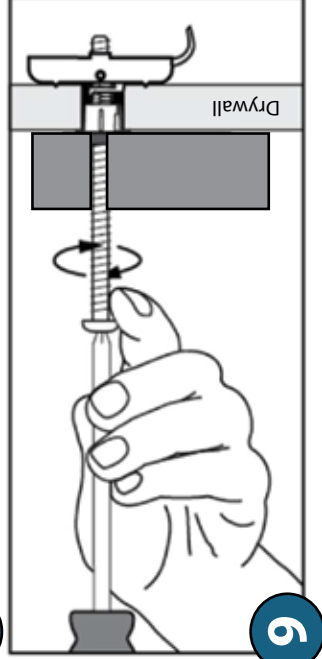

9



Do not use for mounting televisions. Anchors hold up to 137 lbs for 1/2" drywall.
Warning: This product can expose you to chemicals including nickel, lead, which are unknown to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov



Scan to view
 installation video.

<https://delivr.com/28vm6>

ASSEMBLY INSTRUCTIONS FOR CORNER FLOOR-MOUNTED UNITS



Scan to watch the assembly video
<https://delivr.com/2ct43>

WARNING: HEAVY UNIT

Due to the size and weight of this unit, two people are required for safe assembly and handling. Do not attempt to assemble or move the unit alone.

Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit. Be mindful of your fingers while assembling. Ensure the area is clear before snapping the product into place to avoid any potential injuries.

Keep area free of children and pets while assembling and installing.

IMPORTANT

- Read instructions in their entirety before you start.
- Unwrap all packaging materials and place the components on a clean surface to protect them from damage.
- Carefully check to ensure that you have all the parts before beginning assembly.
- Due to the size of this product, we recommend that it is assembled in or near the room intended for use.

BEFORE BEGINNING ASSEMBLY

Two people are required for safe assembly and handling.



TOOLS (OPTIONAL)

Rubber mallet

PARTS IDENTIFICATION

Part quantities will vary depending on unit size.


A	Side Panels (Left & Right)
B	Fixed Shelves
C	Fixed Shelf Support Rails
D	Middle Support Rail (not included in all units)
E	Toe Kick
F	I-Beam
G	Back Corner Panel
H	Closet Rod Mounting Brackets and #6 x 5/8" Wood Screws (sold separately)
I	Oval Closet Rod (sold separately)
J	Shelf Pins
K	Adjustable Shelves (not included in all units)
L	#8 x 2-5/8" Truss Head Wood Screws
M	Wall Anchors & Screws

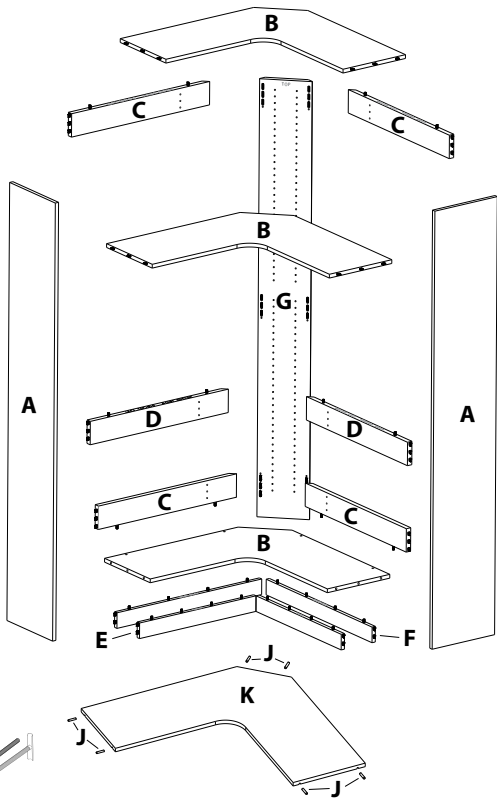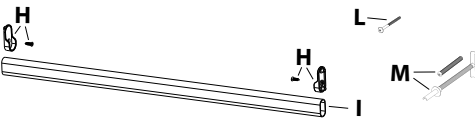


QUICKSNAP™ CONNECTORS

Carefully review the instructions and ensure proper alignment during assembly. All connectors must line up when assembling. Depending on the closet type, some may require dowels. Dowels must line up when assembling. Additional connectors are included for replacement if needed during installation.


BEFORE INSTALLATION, ENSURE ALL CONNECTORS ARE LOCKED IN PLACE.

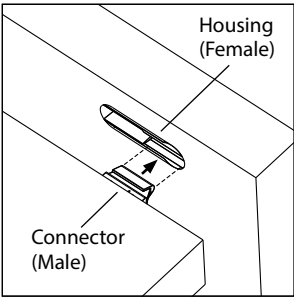

1. Push connector into housing until panels are flush.

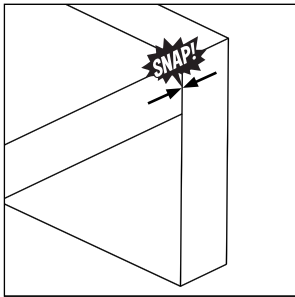


2. Make sure there is no gap between the panels.

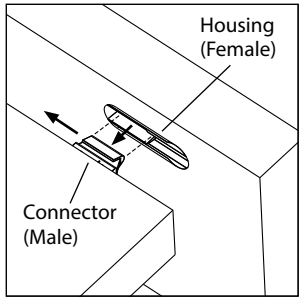

3. To disassemble, slide the panel with the connector back, then pull the panels apart.


For full disassembly instructions, visit www.NorthPointClosets.com

Step 1: Prepare Fixed Shelves

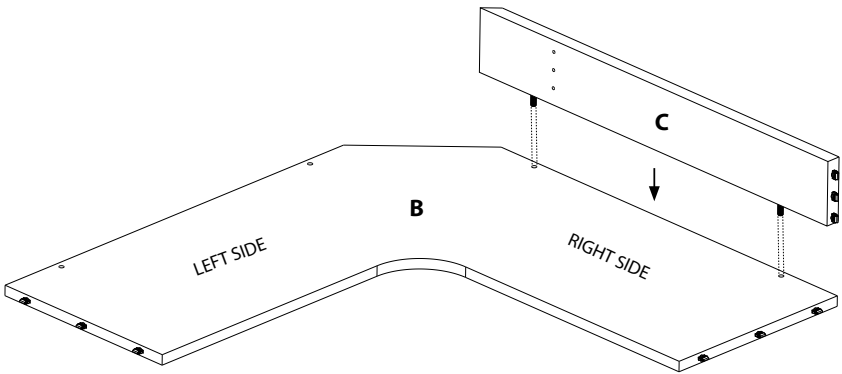


Starting with the right side, secure the (C) **Fixed Shelf Support Rail** to the corresponding (B) **Fixed Shelf** using the pre-installed wooden dowels. Repeat this process for each fixed shelf on the same side of the unit. **Important:** Confirm that the angled end of the support rail matches the angled corner on the shelf to ensure proper orientation. The (C) **Fixed Shelf Support Rails** attach to the bottom of the top and middle (B) **Fixed Shelves** and attach to the top of the bottom (B) **Fixed Shelf**.

Step 2: Attach Toe Kick and I-Beam

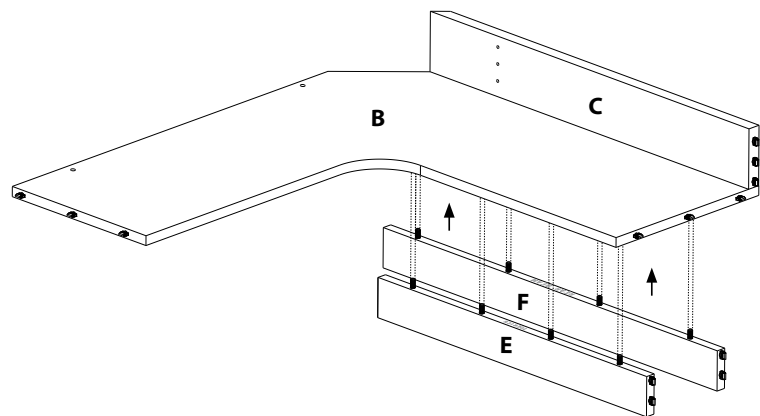


Starting with the same side in Step 1. On the bottom (B) Fixed Shelf secure the (E) Toe Kick and the (F) I-Beam to the bottom of the (B) Fixed Shelf with pre-installed wood dowels.
Important: Confirm that the connectors on the (E) Toe Kick and (F) I-Beam are facing the side of the unit.

Step 4: Snap Back Corner Panel Into Place

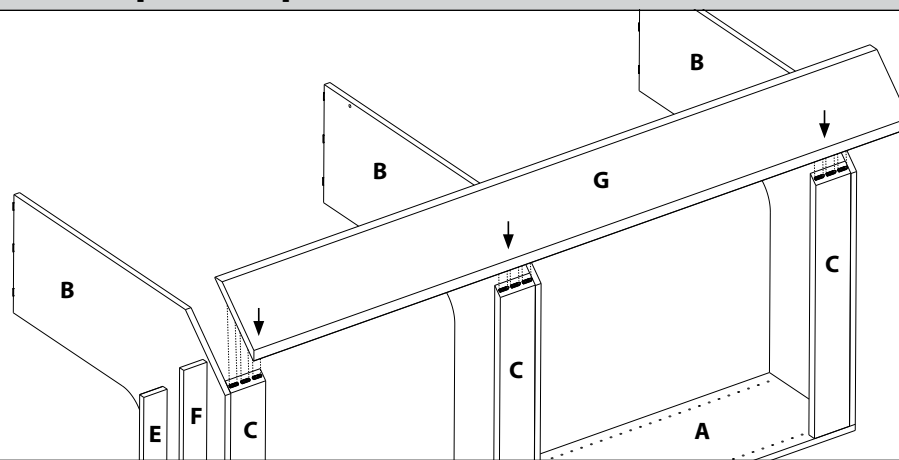

Position the (G) Back Corner Panel. Starting at the top, align the male connector on each (C) Fixed Shelf Support Rail with the corresponding female housing on the (G) Back Corner Panel. Once properly aligned, press firmly to snap each connector securely into place. Continue from top to bottom until the (G) Back Corner Panel is fully secured.

Step 3: Snap Fixed Shelves & Support Rails to Panels

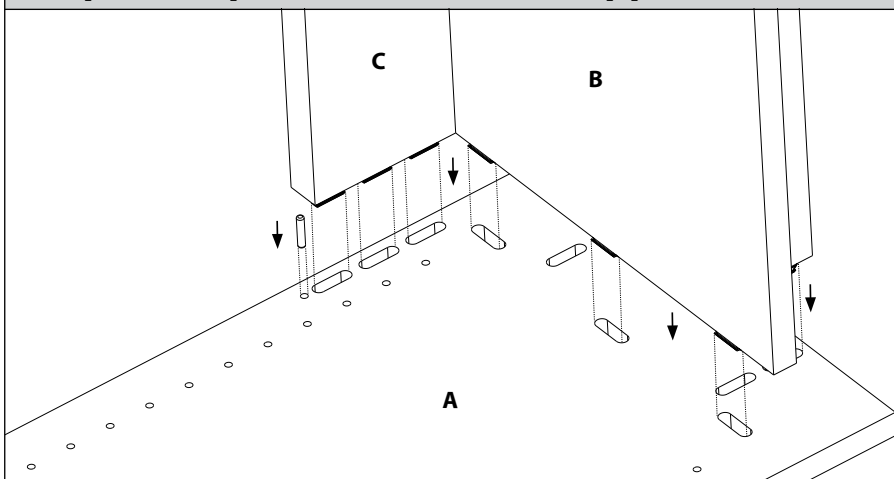


Position the right (A) Side Panel flat on the ground with the female housings facing upward. Locate the top of the panel.

At the top of the panel, align the male connectors on the (B) Fixed Shelf and the male connectors on the (C) Fixed Shelf Support Rail with the corresponding female housings on the (A) Side Panel. Once properly aligned, snap the connectors securely into place. Repeat this process for the middle and bottom fixed shelves.

Place (J) Shelf Pin in pin hole located on the panel below the (C) Fixed Shelf Support Rail. This will keep the support rail in place when installing the unit in place.

Step 5: Attach Remaining Support Rails

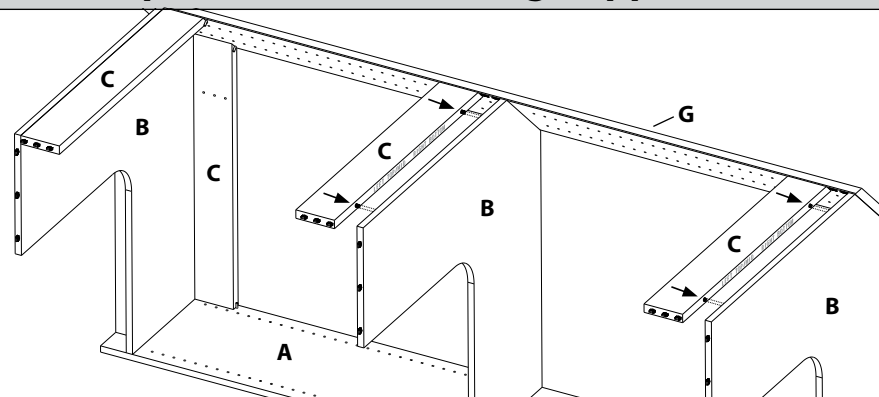


Starting at the top of the unit on the left side, attach the corresponding (C) Fixed Shelf Support Rail to the (B) Fixed Shelf and (G) Back Corner Panel. Position the corner male connector of the (C) Fixed Shelf Support Rail into the open lower portion of the female housing on the (G) Back Corner Panel. Once aligned, insert the (C) Fixed Shelf Support Rail into the housing.

Next, align the wooden dowels on the (C) Fixed Shelf Support Rail with the corresponding holes in the (B) Fixed Shelf. Push the (C) Fixed Shelf Support Rail firmly into the (B) Fixed Shelf, while locking the rail securely into place on the (G) Back Corner Panel.

Repeat this process for each support rail on the same side of the unit.


IMPORTANT: Before assembling, confirm that each Support Rail is correctly oriented for the left or right side of the unit.
PRO TIP: Temporarily secure the Support Rail to the Fixed Shelf with clamps or masking tape to help keep in place until the remaining panel is installed.

Step 6: Attach Remaining Toe Kick & I-Beam

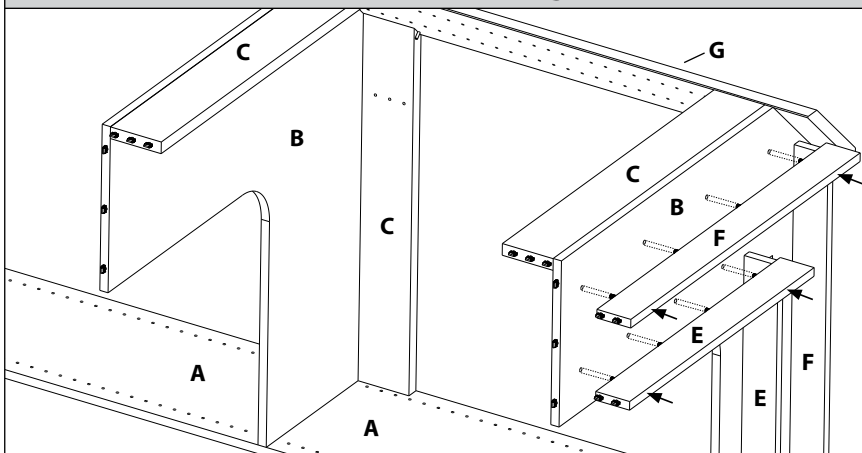

On the same side in Step 5: On the bottom (B) **Fixed Shelf** secure the (E) **Toe Kick** and the (F) **I-Beam** to the bottom of the fixed shelf with pre-installed wood dowels.

Step 7: Attach Opposite Side Panel & Place Shelf Pins

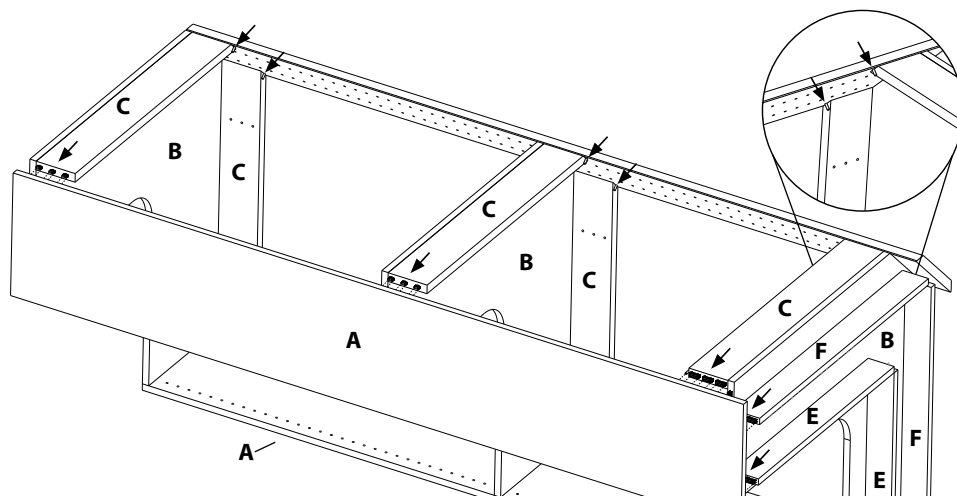


Take the opposite (A) **Side Panel** and align the female housings with the male connectors on the (B) **Fixed Shelf** at the top and bottom, the (C) **Fixed Shelf Support Rail**, (E) **Toe Kick**, and (F) **I-Beam**. Once properly aligned, snap the (A) **Side Panel** securely into place.

Place (J) **Shelf Pins** in the pin holes located on the (G) **Back Corner Panel** below the top and middle (C) **Fixed Shelf Support Rail** and above the bottom (C) **Fixed Shelf Support Rail**. This will keep the rails in place when installing the unit to the wall. Once assembled, carefully lift it so it is standing upright.

WARNING: HEAVY UNIT, two people are required for safety.

Step 8: Attach Closet Rod (if applicable)

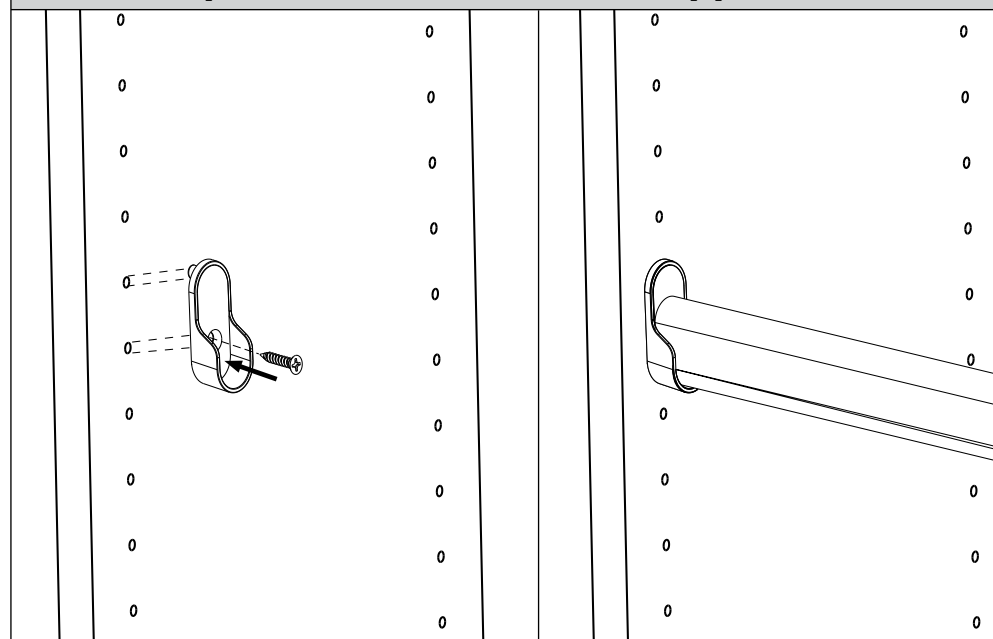

Attach (H) **Closet Rod Mounting Bracket** where desired and secure with the (H) **#6 x 5/8" Wood Screw** provided. Repeat for the other side. Once the brackets are securely in place, slide the (I) **Oval Closet Rod** into the brackets.

Step 9: Install Adjustable Shelves

After the unit is secured to the wall, place (K) **Adjustable Shelves** where desired using (J) **Shelf Pins** to hold in place.

IMPORTANT: The adjustable shelves in the 72" high unit must be placed inside the top section before the unit is secured to the wall. The shelves can be adjusted within the unit but CANNOT be removed once installed to the wall.

**See instructions on next page for
installation to the wall.
Unit MUST be affixed to the wall.**

SAFETY INFORMATION AND WARNINGS

WARRANTY

See warranty and terms and conditions for more details.

ATTENTION

- Please inspect the product upon arrival and report any damage immediately.
- This product is designed for indoor use only.
- Please verify dimensions and compatibility with your space before assembly.
- Two-person assembly and installation is recommended for units 48" and taller.

WARNING

- Qualified professional installation is recommended. Manufacturer is not liable for any damages or injury caused by homeowner assembly or improper installation. Please see warranty and terms and conditions.
- Do not exceed recommended weight limits, which are specified in the unit specifications. Exceeding these limits may result in structural failure or injury.
- Be mindful of your fingers while assembling. Ensure the area is clear before snapping the product into place to avoid any potential injuries.

- Must be securely mounted to wall stud(s) before use. Failure to follow the assembly and installation instructions may result in injury or damage.
- Keep small parts and packaging materials away from children and pets to avoid choking hazards.
- Some parts may have sharp points or edges in the unassembled state. Take care when handling pieces to avoid injury.
- Keep area free of children and pets while assembling and installing.
- This product is heavy. Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit.

MODIFICATIONS

Modifications or alterations to this product are not recommended and may void the warranty. Our closet systems are designed and tested for structural integrity in their original sizes and configurations. Unauthorized changes—such as cutting, drilling, or routing—can compromise performance and may result in damage, structural failure, or injury.

If modifications are necessary (e.g., to accommodate lighting), they must be done with care and at the customer's own risk. Please consult the warranty documentation for full details. The manufacturer is not liable for any injuries or damages arising from modified or altered units.

INSTALLATION: PREPARING AND INSTALLING

PREPARE YOUR SPACE

1. Prepare Walls
 - Make sure walls are clean and free of obstruction before installation.
2. Survey Wall Structure
 - Survey the wall structure, ensuring that you can fasten to wall studs. Make sure there are no wires and pipes that may interfere. Don't drill, cut, or fasten anything into areas of the wall where there might be hidden systems like electrical wires, water pipes, gas lines, or HVAC ducts.

TOOLS NEEDED

Stud finder, level, drill, stud screws, wall anchors and screws
(Provided stud screws and anchors are strongly recommended. Manufacturer is not liable for any damage or injury resulting from the use of alternative hardware or installation materials.)

INSTALL



NOTE: We strongly recommend having two people perform installation.

1. IMPORTANT: Locate Wall Studs
 - Locate wall studs and mark their positions.
2. Position Unit on Wall
 - Position the unit on the wall, ensuring that the unit will be attached to studs.





NOTE: Unit must be attached to at minimum one stud. For the most secure installation, attach unit to two or more studs, depending on the width of the unit. For narrow units, it is likely only one stud will overlap the unit. In that case, use included wall anchors to attach the other side of the unit to the wall. One wall anchor per support rail is required for secure installation.

3. Drill Holes for Primary Support Screws
 - Drill holes for **(L) #8 x 5/8" Truss Head Wood Screws** into all support rails at each stud.
NOTE: Drill bits must be sized appropriately for the screws being used. Follow manufacturer instructions.

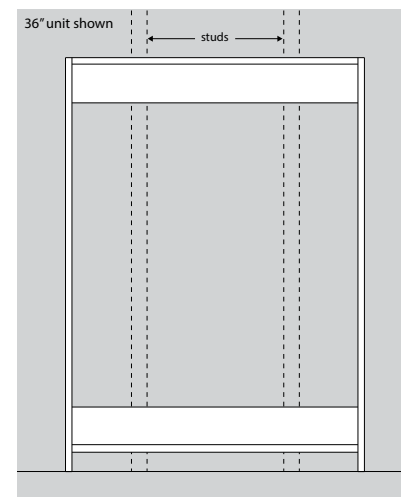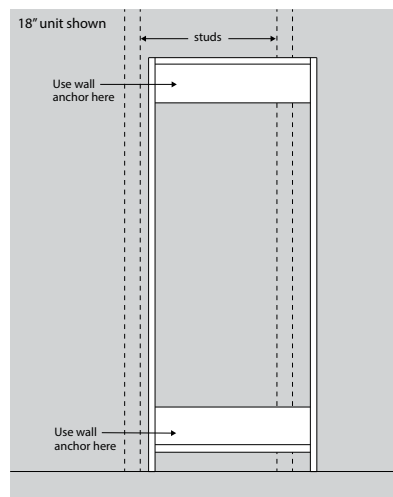

4. Drill Holes for Secondary Support Anchors
 - Drill holes for **(M) Wall Anchors** into all support rails at any location that extends more than 8" past a stud. **NOTE:** Drill bits must be sized appropriately for the anchors being used. Follow manufacturer instructions on the back of this sheet.
5. Attach Secondary Support Anchors to Wall
 - Reposition the unit on the wall, ensuring it is level and properly aligned with the studs. Secure the support rails to the wall using included **(L) #8 x 2-5/8" Truss Head Wood Screws** to attach to studs and/or included 1/4" x 2-1/2" screws for wall anchors. Double-check the stability of the entire unit, ensuring it is securely attached and all components are properly installed.
6. Strongly recommended (optional): Secure Units to Each Other
 - Ensure everything is level and securely in place. Then secure the side panels of the units together using screws (we recommend #6 x 1" coarse thread drywall screws). Double-check all screws and connections to ensure the system is stable.

Anchor Installation Guide

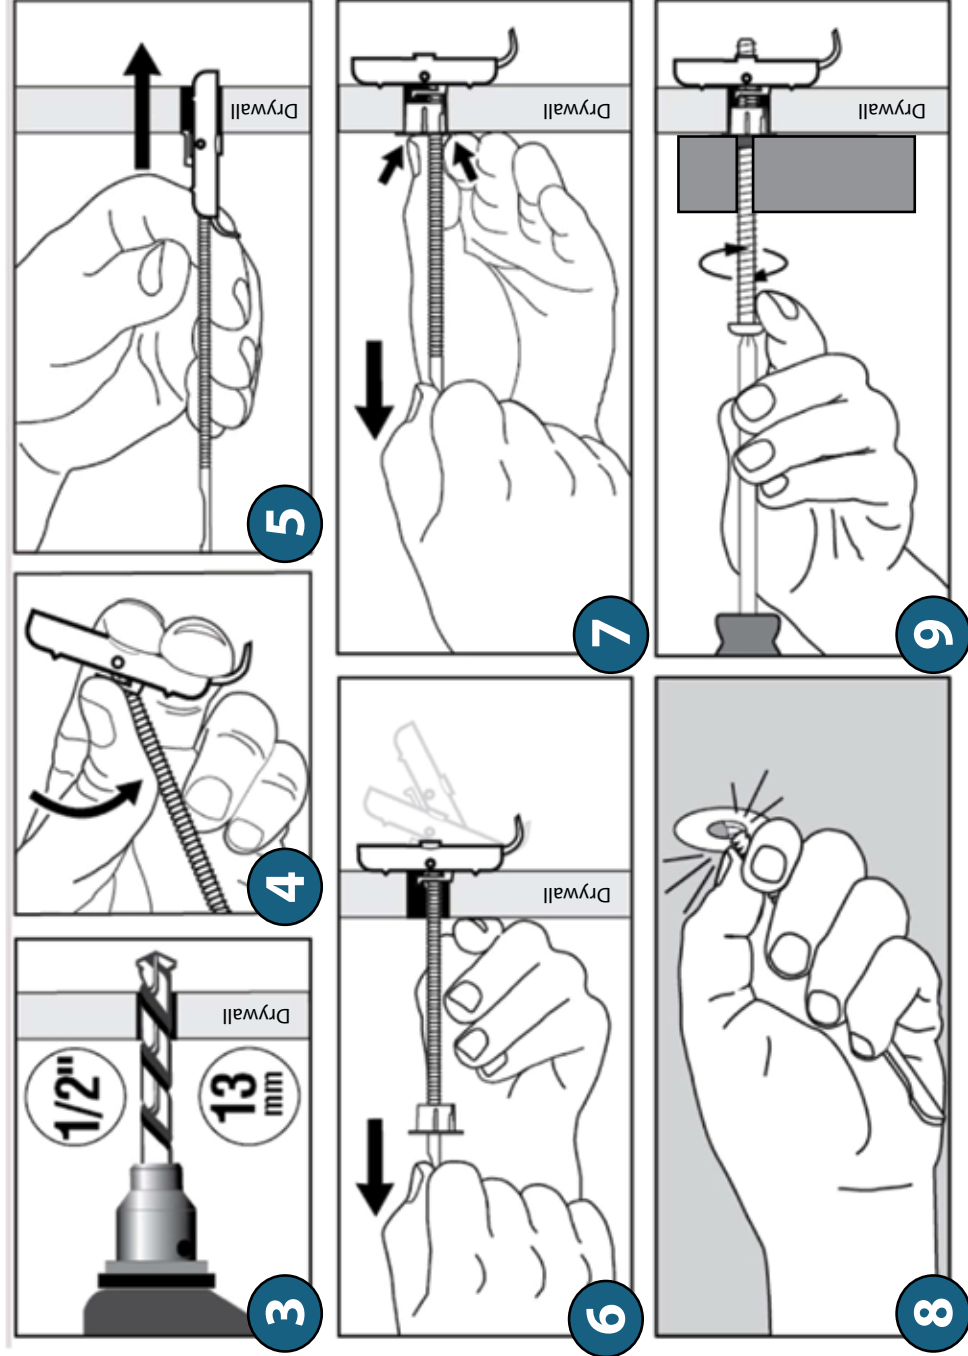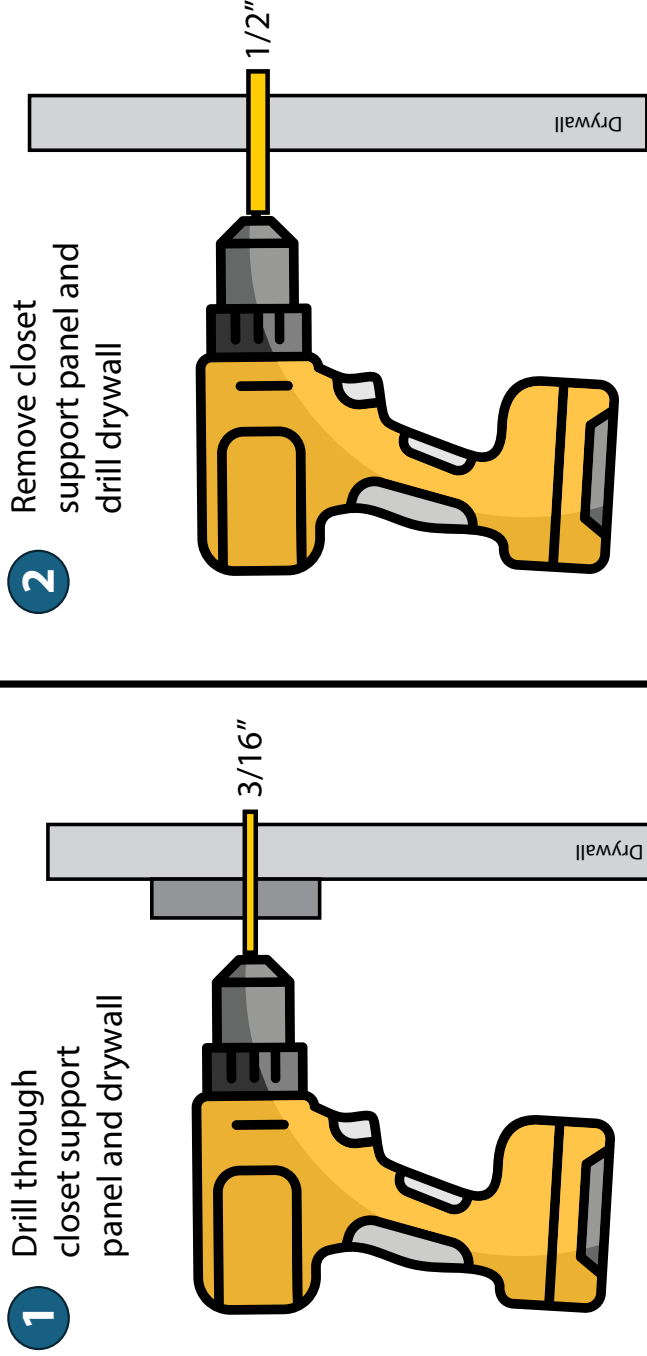


Do not use for mounting televisions. Anchors hold up to 137 lbs for 1/2" drywall.
Warning: This product can expose you to chemicals including nickel, lead, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov



Scan to view
 installation video.
<https://delivr.com/28vm6>

ASSEMBLY INSTRUCTIONS FOR WALL-MOUNTED UNITS

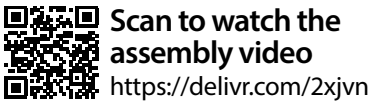

WARNING

Keep area free of children and pets while assembling and installing.

CAUTION

This product is heavy. Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit. Be mindful of your fingers while assembling. Ensure the area is clear before snapping the product into place to avoid any potential injuries.

IMPORTANT

- Read instructions in their entirety before you start.
- Unwrap all packaging materials and place the components on a clean surface to protect them from damage.
- Carefully check to ensure that you have all the parts before beginning assembly.
- Due to the size of this product, we recommend that it is assembled in or near the room intended for use.

BEFORE BEGINNING ASSEMBLY

Determine the number of people required to assemble: 1 person for units shorter than 48", 2 persons for units 48" and taller



TOOLS NECESSARY

Rubber mallet, screwdriver

PARTS IDENTIFICATION

Part quantities will vary depending on unit size.


A	Side Panels (Left & Right)
B	Fixed Shelves
C	Fixed Shelf Support Rails
D	Closet Rod Mounting Brackets and #6 x 5/8" Wood Screws (sold separately)
E	Oval Closet Rod (sold separately)
F	Shelf Pins
G	Adjustable Shelves
H	#8 x 2-5/8" Truss Head Wood Screws
I	Wall Anchors & Screws

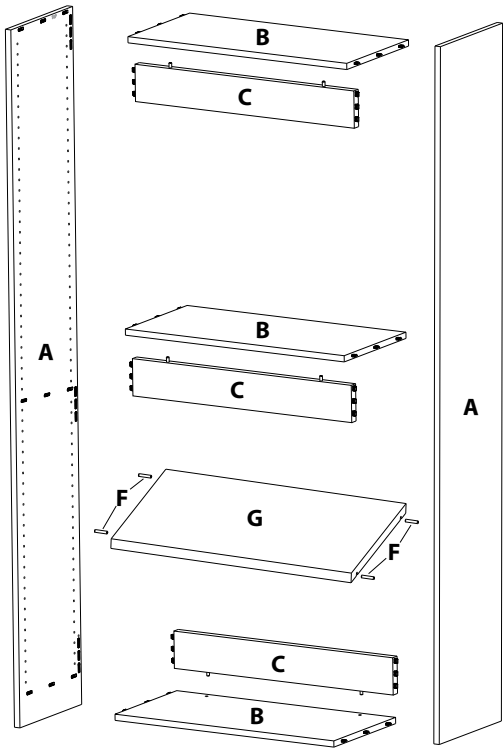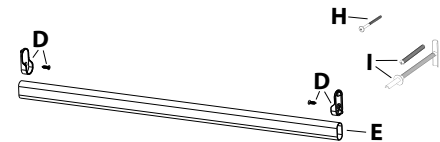


QUICKSNAP™ CONNECTORS

Carefully review the instructions and ensure proper alignment during assembly. All connectors must line up when assembling. Depending on the closet type, some may require dowels. Dowels must line up when assembling. Additional connectors are included for replacement if needed during installation.


BEFORE INSTALLATION, ENSURE ALL CONNECTORS ARE LOCKED IN PLACE.

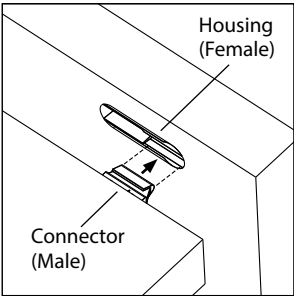

1. Push connector into housing until panels are flush.

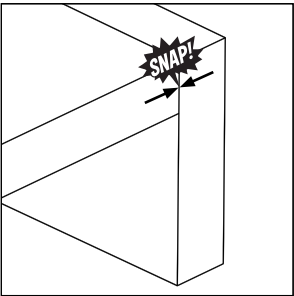


2. Make sure there is no gap between the panels.

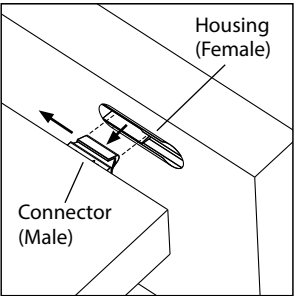

3. To disassemble, slide the panel with the connector back, then pull the panels apart.


For full disassembly instructions, visit www.NorthPointClosets.com

Step 1: Prepare Fixed Shelves

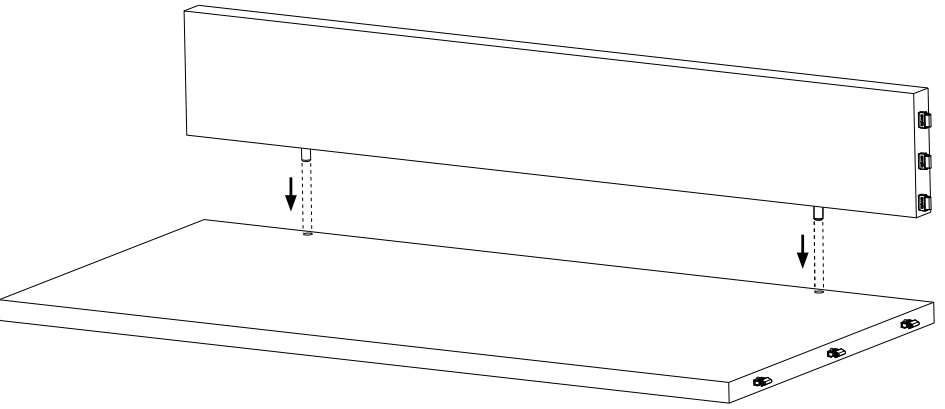

Secure the (C) **Fixed Shelf Support Rail** to the (B) **Fixed Shelf** using the pre-installed wood dowels. Repeat this step as needed for all fixed shelves included with unit.

Step 2: Snap Fixed Shelves to Panels

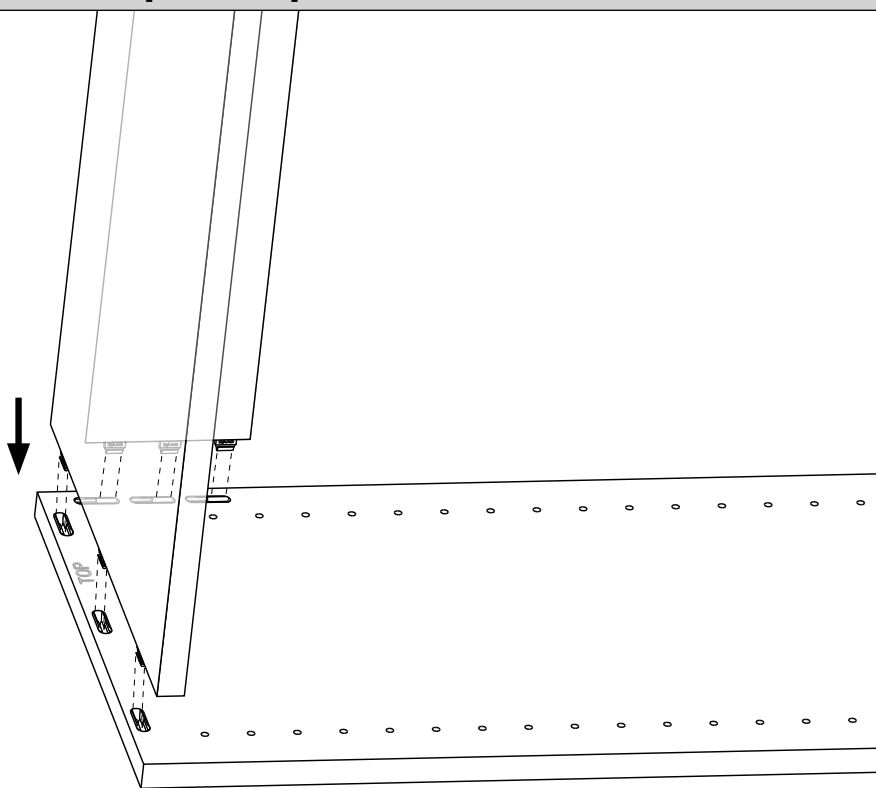


Position the left or right **(A) Side Panel** flat on the ground with the female housings facing upward. Locate the top of the panel.

At the top of the panel, align the male connectors on the **(B) Fixed Shelf** and the male connectors on the **(C) Fixed Shelf Support Rail** with the corresponding female housings on the **(A) Side Panel**. Once properly aligned, snap the connectors securely into place. Repeat this process for the middle (if applicable) and bottom fixed shelves. **Note:** Depending on your closet unit configuration, the shelf and rail will attach to the side panels with the support rail either above or below the fixed shelf. Use QuickSnap™ connector locations to guide proper placement.

Take the opposite **(A) Side Panel** and align the female housings with the male connectors on the **(B) Fixed Shelf** and **(C) Fixed Shelf Support Rail**. Once properly aligned, snap the **(A) Side Panel** securely into place.

Once assembled, gently lay the unit on its back so the front is facing up, then carefully lift it so it is standing upright. Use 2 people for units over 48".

Step 3: Attach Closet Rod (if applicable)

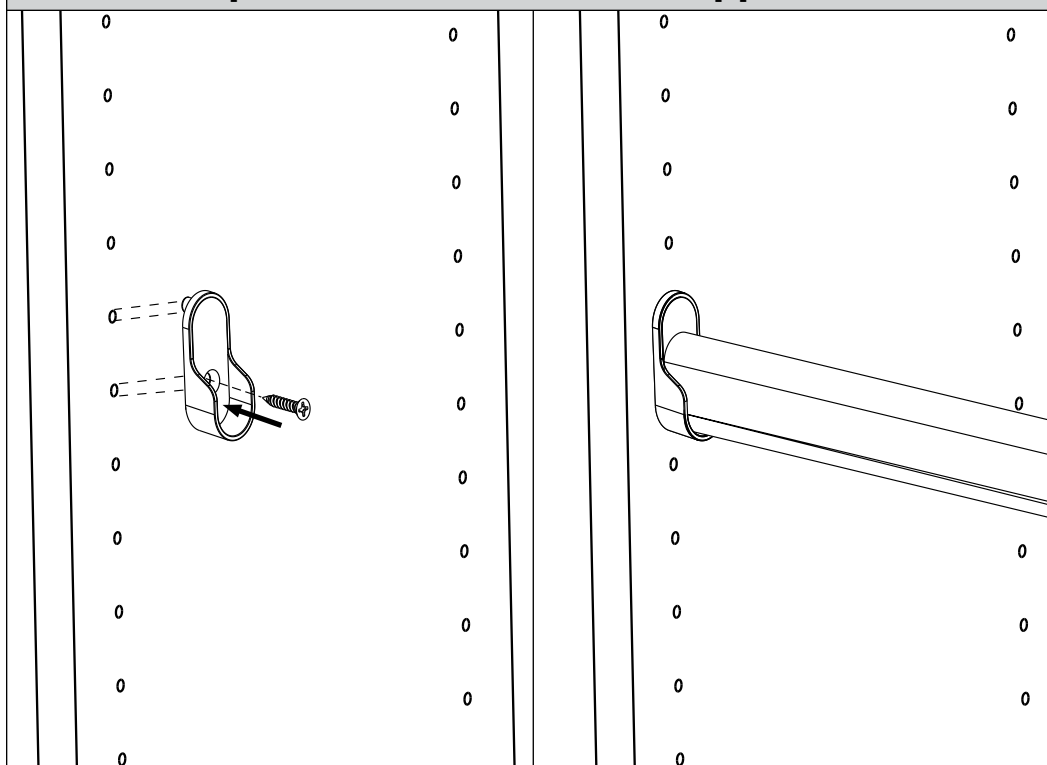

Attach **(D) Closet Rod Mounting Bracket** where desired and secure with the **(D) #6 x 5/8" Wood Screw** provided. Repeat for the other side. Once the brackets are securely in place, slide the **(E) Oval Closet Rod** into the brackets.

Step 4: Install Adjustable Shelves

After the unit is secured to the wall, place **(G) Adjustable Shelves** where desired using **(F) Shelf Pins** to hold in place.

See instructions on next page for installation to the wall. Unit MUST be affixed to the wall.

SAFETY INFORMATION AND WARNINGS

WARRANTY

See warranty and terms and conditions for more details.

ATTENTION

- Please inspect the product upon arrival and report any damage immediately.
- This product is designed for indoor use only.
- All measurements and dimensions provided are approximate. Please verify dimensions and compatibility with your space before assembly.
- Two-person assembly and installation is recommended for units 48" and taller.

WARNING

- Qualified professional installation is recommended. Manufacturer is not liable for any damages or injury caused by homeowner assembly or improper installation. Please see warranty and terms and conditions.
- Do not exceed recommended weight limits, which are specified in the unit specifications. Exceeding these limits may result in structural failure or injury.
- Be mindful of your fingers while assembling. Ensure the area is clear before snapping the product into place to avoid any potential injuries.

- Ensure all components are secured to wall before use. Failure to follow the assembly and installation instructions may result in injury or damage.
- Keep small parts and packaging materials away from children and pets to avoid choking hazards.
- Some parts may have sharp points or edges in the unassembled state. Take care when handling pieces to avoid injury.
- Keep area free of children and pets while assembling and installing.
- This product is heavy. Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit.

MODIFICATIONS

Modifications or alterations to this product are not recommended and may void the warranty. Our closet systems are designed and tested for structural integrity in their original sizes and configurations. Unauthorized changes—such as cutting, drilling, or routing—can compromise performance and may result in damage, structural failure, or injury.

If modifications are necessary (e.g., to accommodate lighting), they must be done with care and at the customer's own risk. Please consult the warranty documentation for full details. The manufacturer is not liable for any injuries or damages arising from modified or altered units.

INSTALLATION: PREPARING AND INSTALLING

PREPARE YOUR SPACE

1. Prepare Walls
 - Make sure walls are clean and free of obstruction before installation.
2. Survey Wall Structure
 - Survey the wall structure, ensuring that you can fasten to wall studs. Make sure there are no wires and pipes that may interfere. Don't drill, cut, or fasten anything into areas of the wall where there might be hidden systems like electrical wires, water pipes, gas lines, or HVAC ducts.

TOOLS NEEDED

Stud finder, level, drill, stud screws, wall anchors and screws
(Provided stud screws and anchors are strongly recommended. Manufacturer is not liable for any damage or injury resulting from the use of alternative hardware or installation materials.)

INSTALL


NOTE: We strongly recommend having two people perform installation. Use installation jacks if installing with only one person.

1. **IMPORTANT:** Locate Wall Studs
 - Locate wall studs and mark their positions.
2. Position Unit on Wall
 - Position the unit on the wall, ensuring that the unit will be attached to studs.



NOTE: Unit must be attached to at minimum one stud. For the most secure installation, attach unit to two or more studs, depending on the width of the unit. For narrow units, it is likely only one stud will overlap the unit. In that case, use included wall anchors to attach the other side of the unit to the wall. One wall anchor per support rail is required for secure installation.

3. Drill Holes for Primary Support Screws
 - Drill holes for **(H) #8 x 2-5/8" Truss Head Wood Screws** into all support rails at each stud. **NOTE:** Drill bits must be sized appropriately for the screws being used. Follow manufacturer instructions.

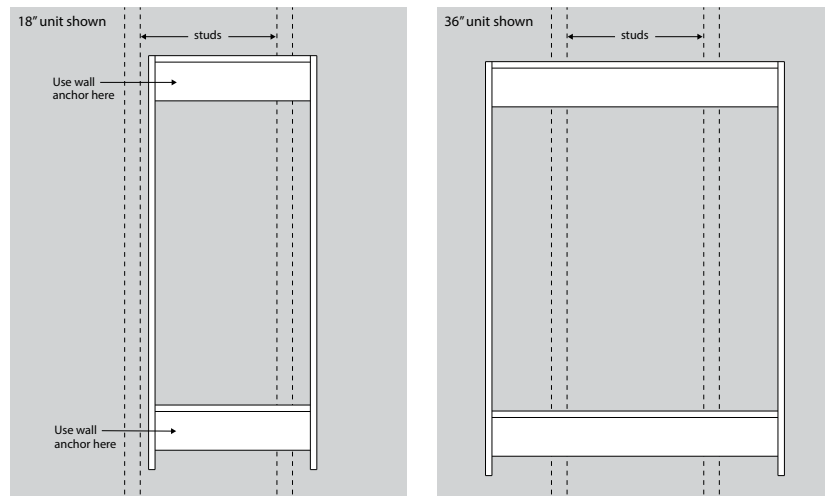


4. Drill Holes for Secondary Support Anchors
 - Drill holes for **(I) Wall Anchors** into all support rails at any location that extends more than 8" past a stud. **NOTE:** Drill bits must be sized appropriately for the anchors being used. Follow manufacturer instructions on the back of this sheet.
5. Attach Secondary Support Anchors to Wall
 - Reposition the unit on the wall, ensuring it is level and properly aligned with the studs. Secure the support rails to the wall using included **(H) #8 x 2-5/8" Truss Head Wood Screws** to attach to studs and/or included 1/4" x 2-1/2" screws for wall anchors. Double-check the stability of the entire unit, ensuring it is securely attached and all components are properly installed.
6. Strongly recommended (optional): Secure Units to Each Other
 - Ensure everything is level and securely in place. Then secure the side panels of the units together using screws (we recommend #6 x 1" coarse thread drywall screws). Double-check all screws and connections to ensure the system is stable.

Anchor Installation Guide









1

Drill through closet support panel and drywall

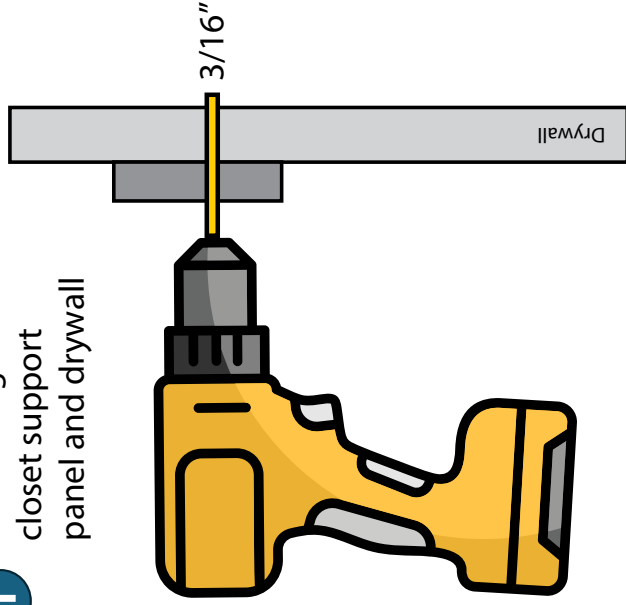

2

Remove closet support panel and drill drywall

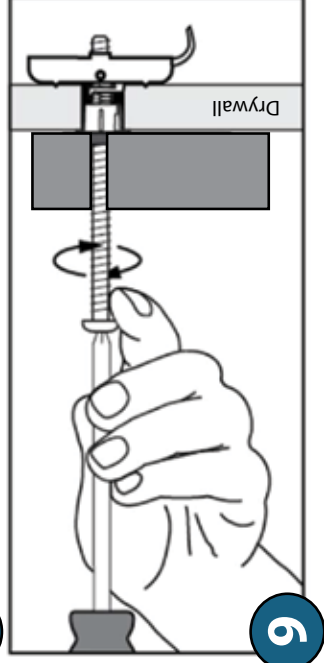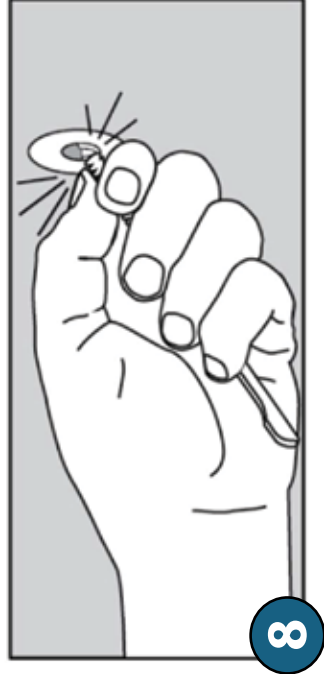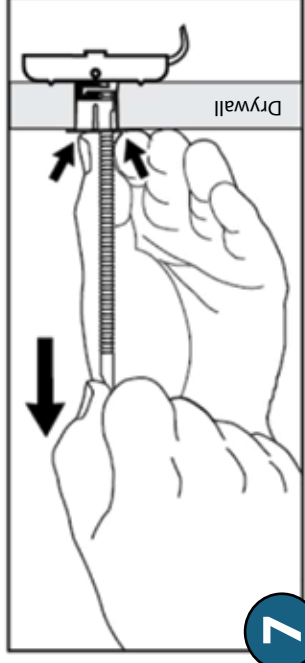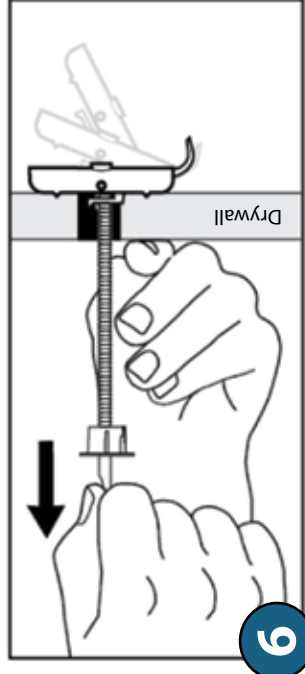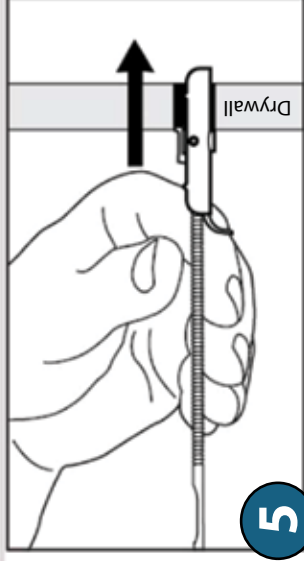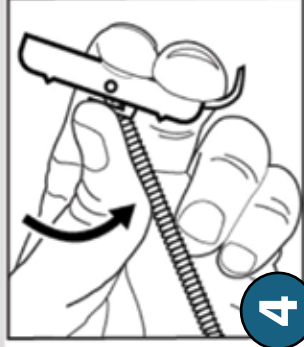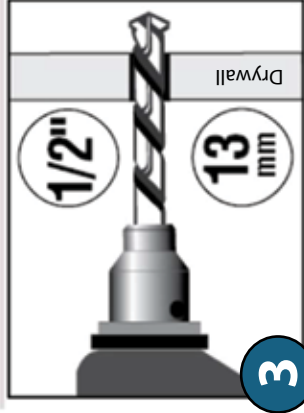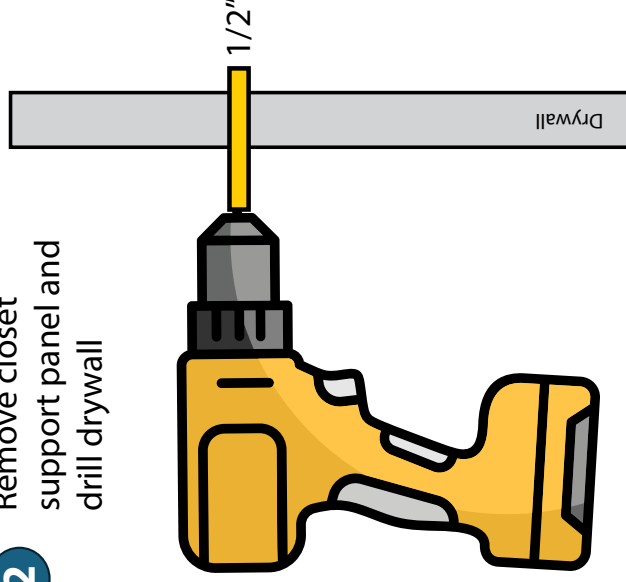

Do not use for mounting televisions. Anchors hold up to 137 lbs for 1/2" drywall.
Warning: This product can expose you to chemicals including nickel, lead, which are unknown to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov



Scan to view
 installation video.

<https://delivr.com/28vm6>

ASSEMBLY INSTRUCTIONS FOR DRAWER BOXES & SLIDES



STOP! READ BEFORE ASSEMBLING

Once drawer boxes are assembled, they cannot be disassembled.
Drawer boxes use **permanent connectors**. Ensure everything is correctly aligned before the final assembly.

IMPORTANT


- Read instructions in their entirety before you start.
- Unwrap all packaging materials and place the components on a clean surface to protect them from damage.
- Carefully check to ensure that you have all the parts before beginning assembly.
- Keep area free of children and pets while assembling and installing.
- Due to the size of this product, we recommend that it is assembled in or near the room intended for use.

TOOLS NECESSARY

Rubber mallet, screwdriver

PARTS IDENTIFICATION


A	Side Panels (Left & Right)
B	Front Panel
C	Back Panel
D	Bottom Panel
E	Drawer Front
F	#4 x 1" Phillips Flat Head Wood Screws
G	HR MAX™ 303-300 Soft-Close Ball Bearing Slides
H	#6 x 1/2" Phillips Flat Head Wood Screws
I	M6.3 x 10 mm Euro Screws

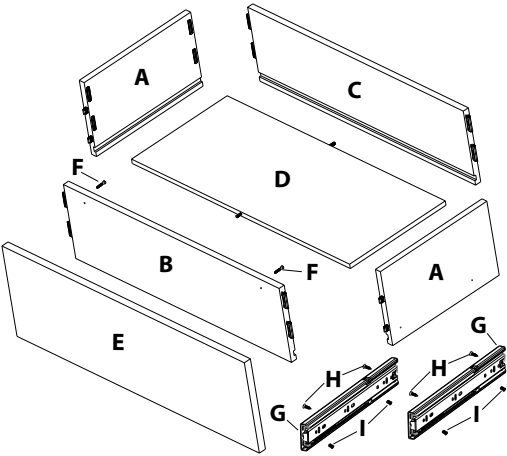


QUICKSNAP™ CONNECTORS

Carefully review the instructions and ensure proper alignment during assembly. All connectors must line up when assembling. Depending on the drawer box type, some may require dowels. Dowels must line up when assembling. Additional connectors are included for replacement if needed during installation.

BEFORE INSTALLATION, ENSURE ALL CONNECTORS ARE LOCKED IN PLACE.

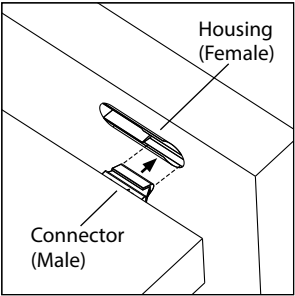


1. Push connector into housing until panels are flush.

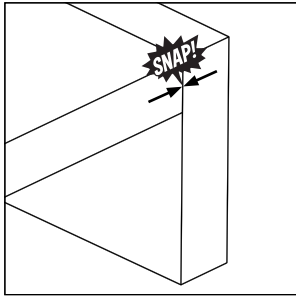

2. Make sure there is no gap between the panels.


NOTE: The four sides of the drawer box use permanent connectors, but the drawer front attaches to the box with removable connectors.

Assemble the Drawer Box

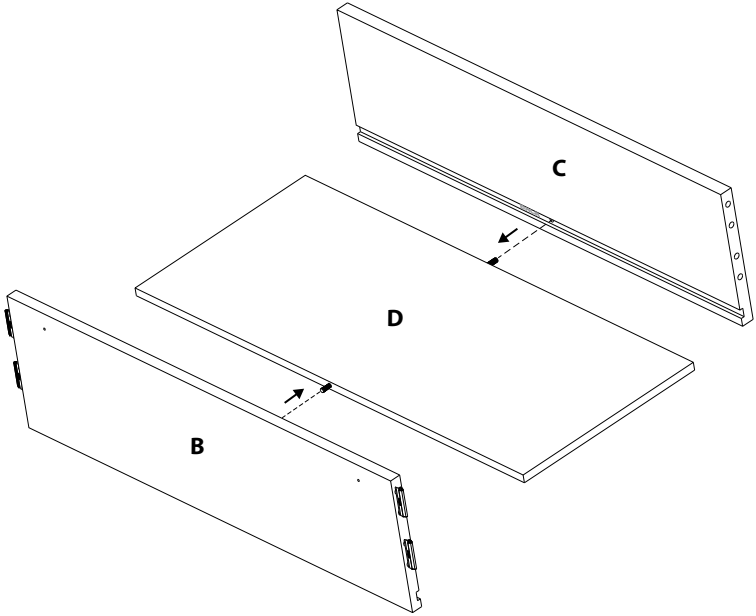


1. Align the **(D) Bottom Panel** with the groove on the **(B) Front Panel** and connect the two pieces using the preinstalled dowels. Repeat this step to attach the **(D) Bottom Panel** to the **(C) Back Panel**.

Left

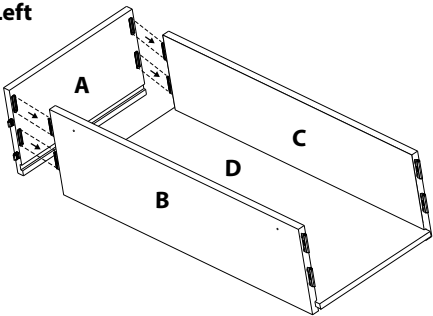

Right

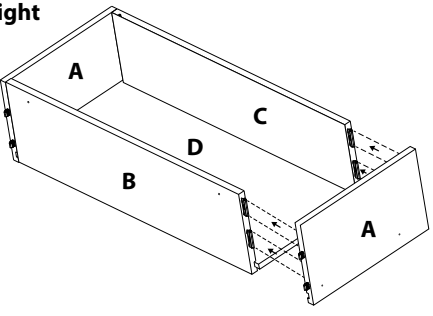


2. Align the **(A) Left Side Panel** groove with the **(D) Bottom Panel** and snap it into place using the QuickSnap™ connectors. Repeat for the **(A) Left Side Panel**.

IMPORTANT! Please be sure the male connectors on the **(A) Left and Right Side Panels** are facing out towards the front of the drawer box.


Continue to the next page for slide assembly and installation into the closet unit.

Step 1: Attach Drawer Member to Drawer Box

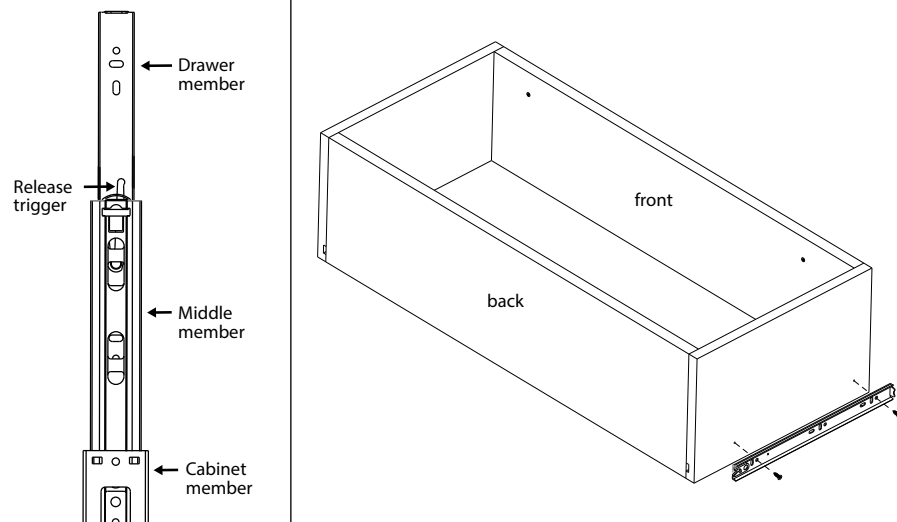


- A. Locate the pre-drilled holes on the left and right **(A) Side Panels**.
- B. Press the release trigger to disconnect the drawer member from the middle member on the **(G) HR MAX™ 303-300 Soft-Close Ball Bearing Slide**. **NOTE:** Either slide can be used on the right or left side of the drawer box.
- C. Align the drawer member with the pre-drilled holes on the **(A) Side Panel**, ensuring it is flush with the front edge. **NOTE:** The front of the drawer box will have male connectors sticking out.
- D. Once aligned, secure the drawer member to the side panel using two **(H) #6 x 1/2" Phillips Flat Head Wood Screws**. Tighten enough to hold, but avoid over-tightening. Ensure the drawer member is straight and aligned for proper functioning.
- E. Repeat Steps A–D for the other side.

Step 2: Attach Cabinet Member to Closet Unit

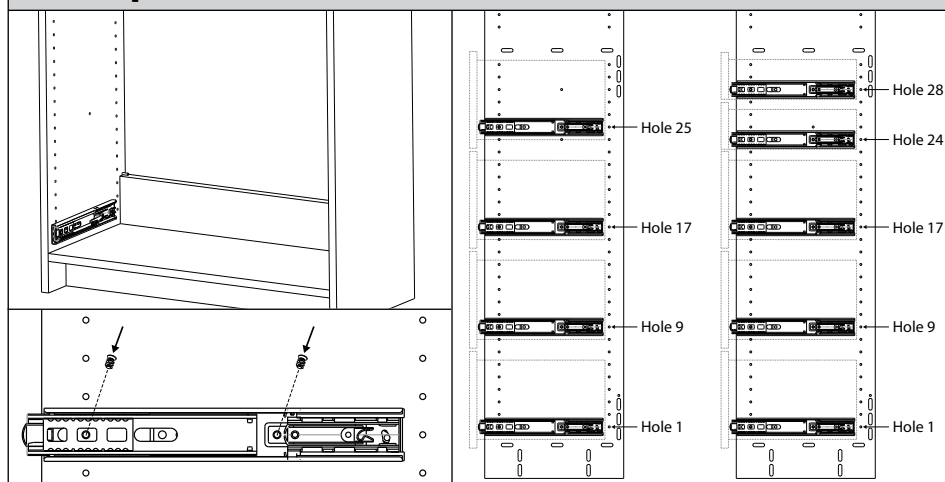

- A. Align the **(G) HR MAX™ 303-300 Soft-Close Ball Bearing Slide** cabinet member with the pre-drilled holes on the inside of the closet side panel, ensuring that the holes being used correspond to the desired drawer box sizes (see illustration above). The top drawer space is pre-drilled to support either two small drawers or one large drawer. For drawer installation in units without pre-drilled holes, please use enclosed template to place holes for cabinet member. **NOTE:** Pre-drilled holes may be accessed by partially extending the middle member from the cabinet member during installation. You may utilize shelf pins to temporarily secure the cabinet member in place for alignment verification before affixing with screws.
- B. Once aligned, secure the cabinet member to the panel using two **(I) M6.3 x 10 mm Euro Screws**. Tighten enough to hold, but avoid over-tightening. Ensure the cabinet member is straight and aligned for proper functioning.
- C. Repeat Steps A–B for the other side.

Step 3: Install Drawer Box

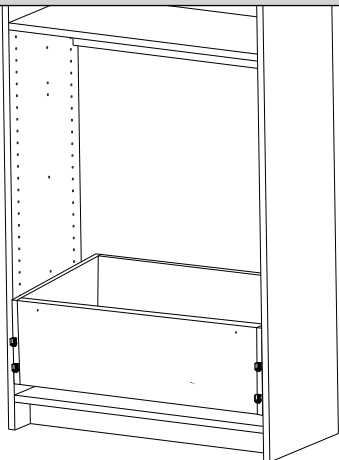


Make sure your closet unit is fully assembled and secured to the wall and that the slides are securely attached to the closet unit and the drawer box.

Position the drawer box to align the drawer member on the side of the drawer box with the cabinet member on the inside of the closet unit. Carefully guide the drawer into place and push the drawer in firmly until you hear a click—this means the slides are locked in place.

Pull the drawer out and push it back in to check that it moves smoothly. Repeat Steps 1–3 for any remaining drawers.

Once all drawers have been installed, open and close each one to make sure everything is aligned and working properly.

Step 4: Install Drawer Front

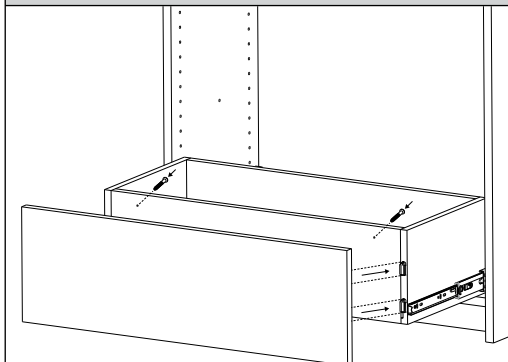

Partially open the drawer box from the closet unit. Align the female housings on the **(E) Drawer Front** to the male connectors on the **(A) Side Panels**, then snap the drawer front into place. **NOTE:** If using decorative hardware, drawer fronts can be removed for installation.

Make sure the drawer fronts are level, then attach the drawer box to the **(E) Drawer Front** with **(H) #4 x 1" Phillips Flat Head Wood Screws** using the pre-drilled holes located on the **(B) Front Panel** of the drawer box.

Repeat for remaining drawers.

SAFETY INFORMATION AND WARNINGS

WARRANTY

See warranty and terms and conditions for details.

ATTENTION

- Please inspect the product upon arrival and report any damage immediately.
- This product is designed for indoor use only.
- All measurements and dimensions provided are approximate. Please verify dimensions and compatibility with your space before assembly.
- Two-person assembly is recommended for units 48" and taller.

WARNING

- Qualified professional installation is recommended. Manufacturer is not liable for any damages or injury caused by homeowner assembly or improper installation. Please see warranty and terms and conditions.
- Do not exceed recommended weight limits, which are specified in the unit specifications. Exceeding these limits may result in structural failure or injury.
- Be mindful of your fingers while assembling. Ensure the area is clear before snapping the product into place to avoid any potential injuries.
- Ensure all components are secured to wall before use. Failure to follow the assembly and installation instructions may result in injury or damage.
- Keep small parts and packaging materials away from children and pets to avoid choking hazards.
- Some parts may have sharp points or edges in the unassembled state. Take care when handling pieces to avoid injury.
- Keep area free of children and pets while assembling and installing.
- This product is heavy. Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit.

MODIFICATIONS

Modifications or alterations to this product are not recommended and may void the warranty. Our closet systems are designed and tested for structural integrity in their original sizes and configurations. Unauthorized changes—such as cutting, drilling, or routing—can compromise performance and may result in damage, structural failure, or injury.

If modifications are necessary (e.g., to accommodate lighting), they must be done with care and at the customer's own risk. Please consult the warranty documentation for full details. The manufacturer is not liable for any injuries or damages arising from modified or altered units.

DISASSEMBLY INSTRUCTIONS

Scan to watch the
disassembly video
<https://delivr.com/2uzu2>

WARNING

Keep area free of children and pets while disassembling and uninstalling.

CAUTION

This product is heavy. Be sure to handle with care and use appropriate lifting techniques to avoid injury. If necessary, seek assistance when lifting or moving the unit. Be mindful of your fingers while disassembling. Ensure the area is clear before beginning disassembly to avoid any potential injuries.

IMPORTANT

- Read instructions in their entirety before you start.

BEFORE BEGINNING DISASSEMBLY



- Remove adjustable shelves, shelf pins, all closet accessories, & drawer boxes (if installed).
- Uninstall from the wall and lay the entire unit gently on a flat surface, with either the left- or right-side panel

OPTIONAL TOOLS




Rubber mallet, plastic pry tool

QUICKSNAP™ CONNECTORS

To disassemble the QuickSnap™ connectors, slide the panel with the connector back, then pull the panels apart. **NOTE: Drawer Boxes use permanent connectors and cannot be disassembled.**

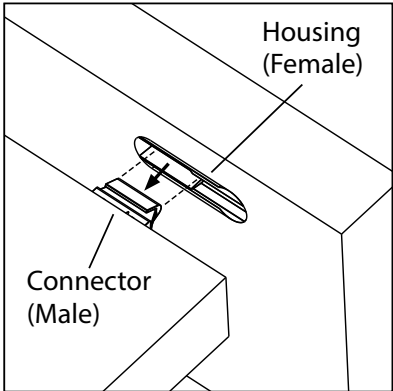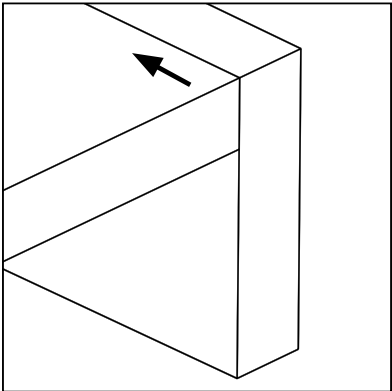

A Fixed Shelf Support Rails	D Fixed Shelves
B Toe Kick (if applicable)	E Middle Support Rail (if applicable)
C I-Beam (if applicable)	F Side Panels (Left and Right)

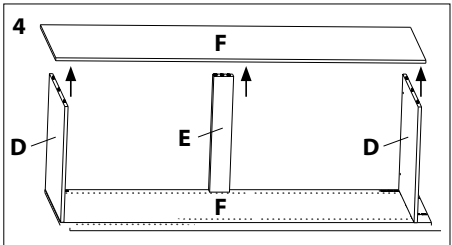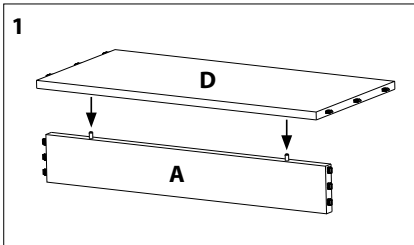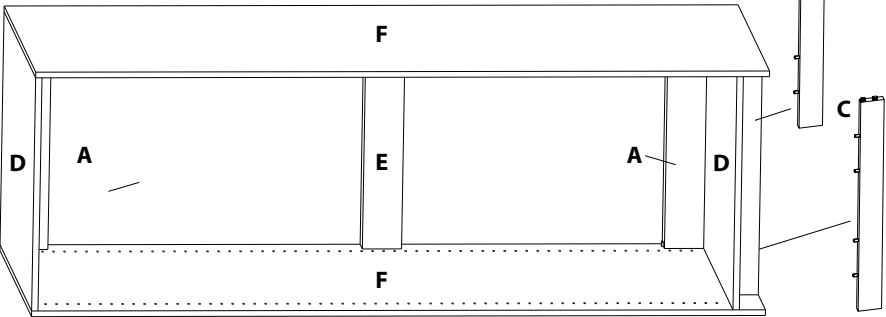

1. Detach Support Rails from Fixed Shelves

Carefully pull each **(A) Fixed Shelf Support Rail** away from the **(D) Fixed Shelf** until the dowels are fully released and the male connectors fully disengage from the corresponding female housings on the **(F) Side Panels (Left and Right)**. Repeat this step as needed for all support rails included with unit.

Note: Depending on your closet unit configuration, the support rail may be affixed either above or below the fixed shelf. For floor-mounted units: Pull the **(B) Toe Kick** and **(C) I-Beam** away from the underside of the bottom **(D) Fixed Shelf**.

2. Disconnect Fixed Shelves

Carefully push each **(D) Fixed Shelf** toward the back of the unit to fully release the male connectors from the corresponding female housings on the side panels. Repeat this process for each fixed shelf until all are fully disengaged.

3. Disconnect Middle Support Rail (if applicable)

Carefully push the **(E) Middle Support Rail** towards the bottom of the unit to fully disengage the male connectors from the corresponding female housings on the **(F) Side Panels (Left and Right)**.

4. Disassemble unit

Once all the support rails and fixed shelves are disengaged from the female housings, carefully lift the **(F) Side Panel** facing up and put aside. Remove all **(D) Fixed Shelves**, **(A) Fixed Shelf Support Rails**, and **(E) Middle Support Rail** (if applicable). **IMPORTANT: Make sure to support each piece as you pull it away.**

Note: The side panel should separate from the fixed shelves and support rails with minimal force. If the side panel does not separate easily, ensure that all QuickSnap™ connectors on the components have been fully released before attempting again.